

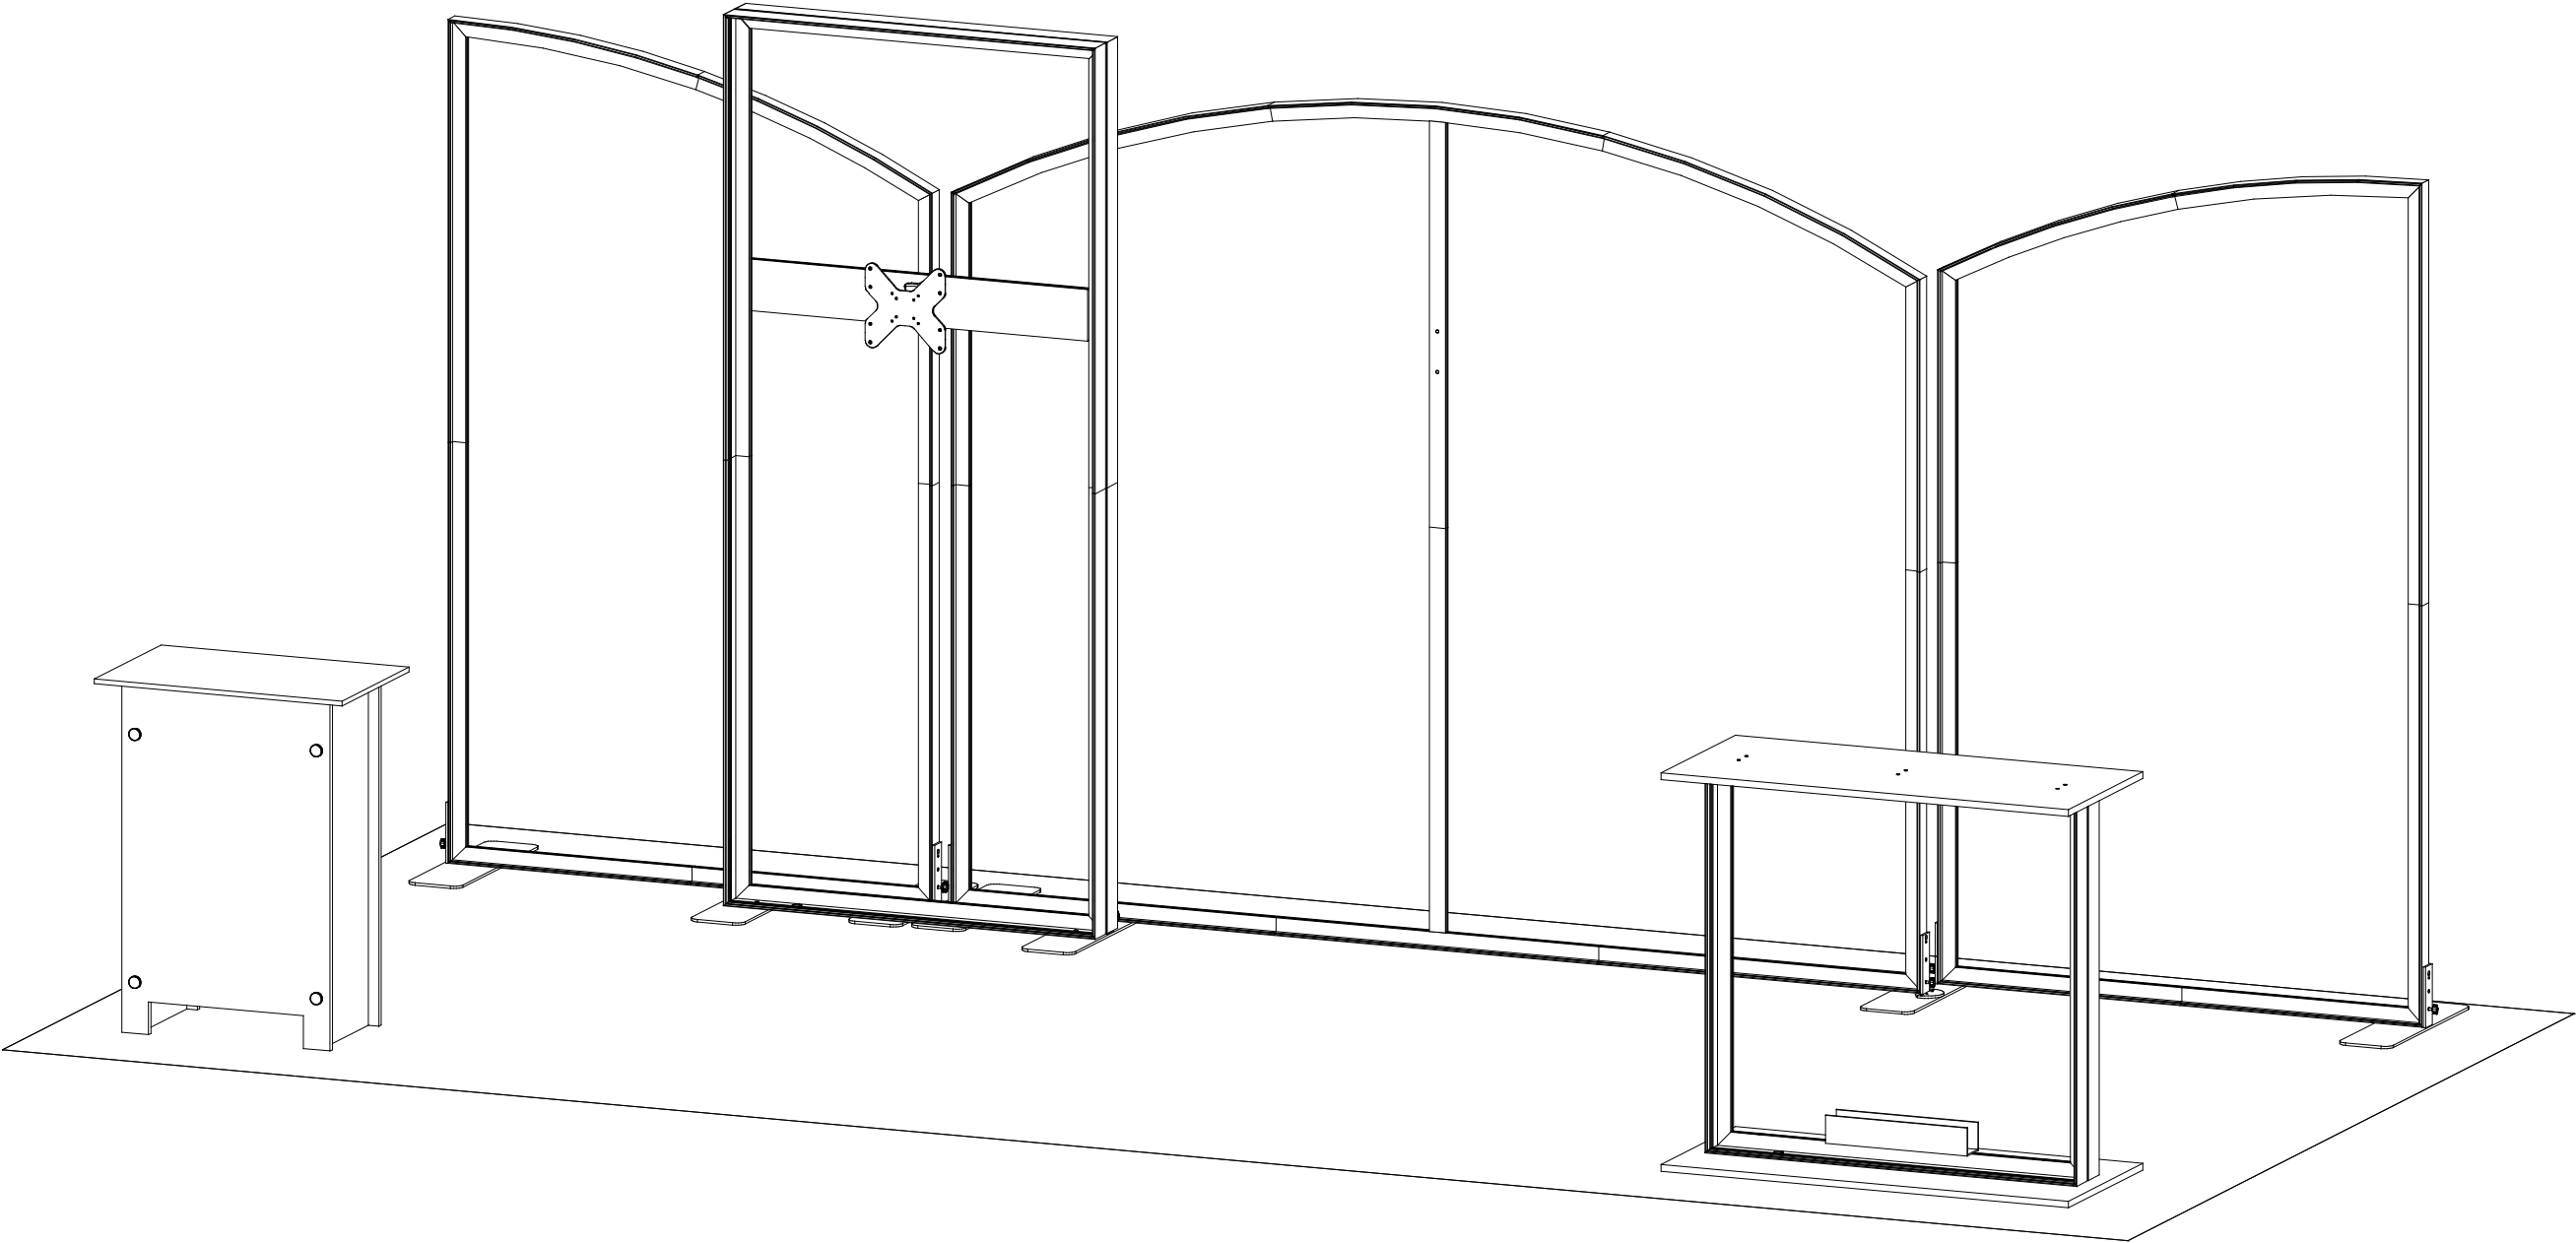
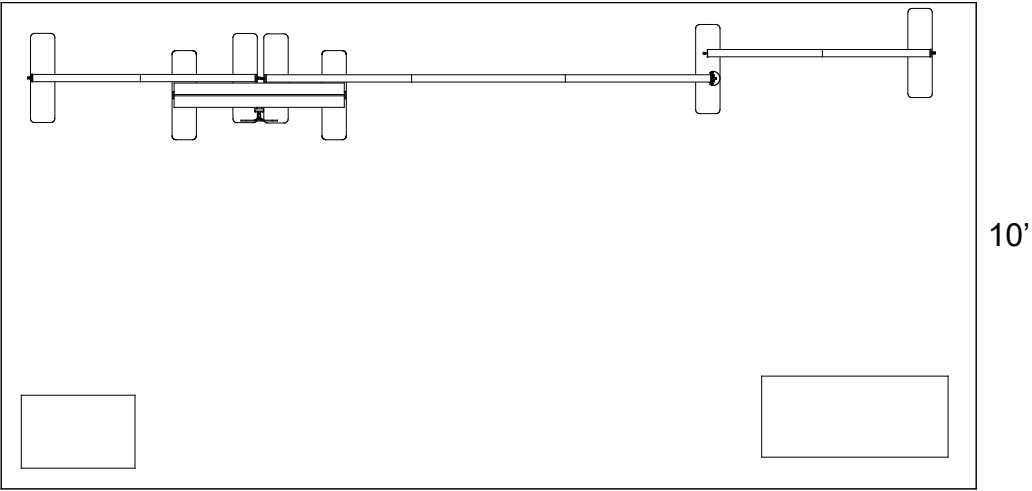


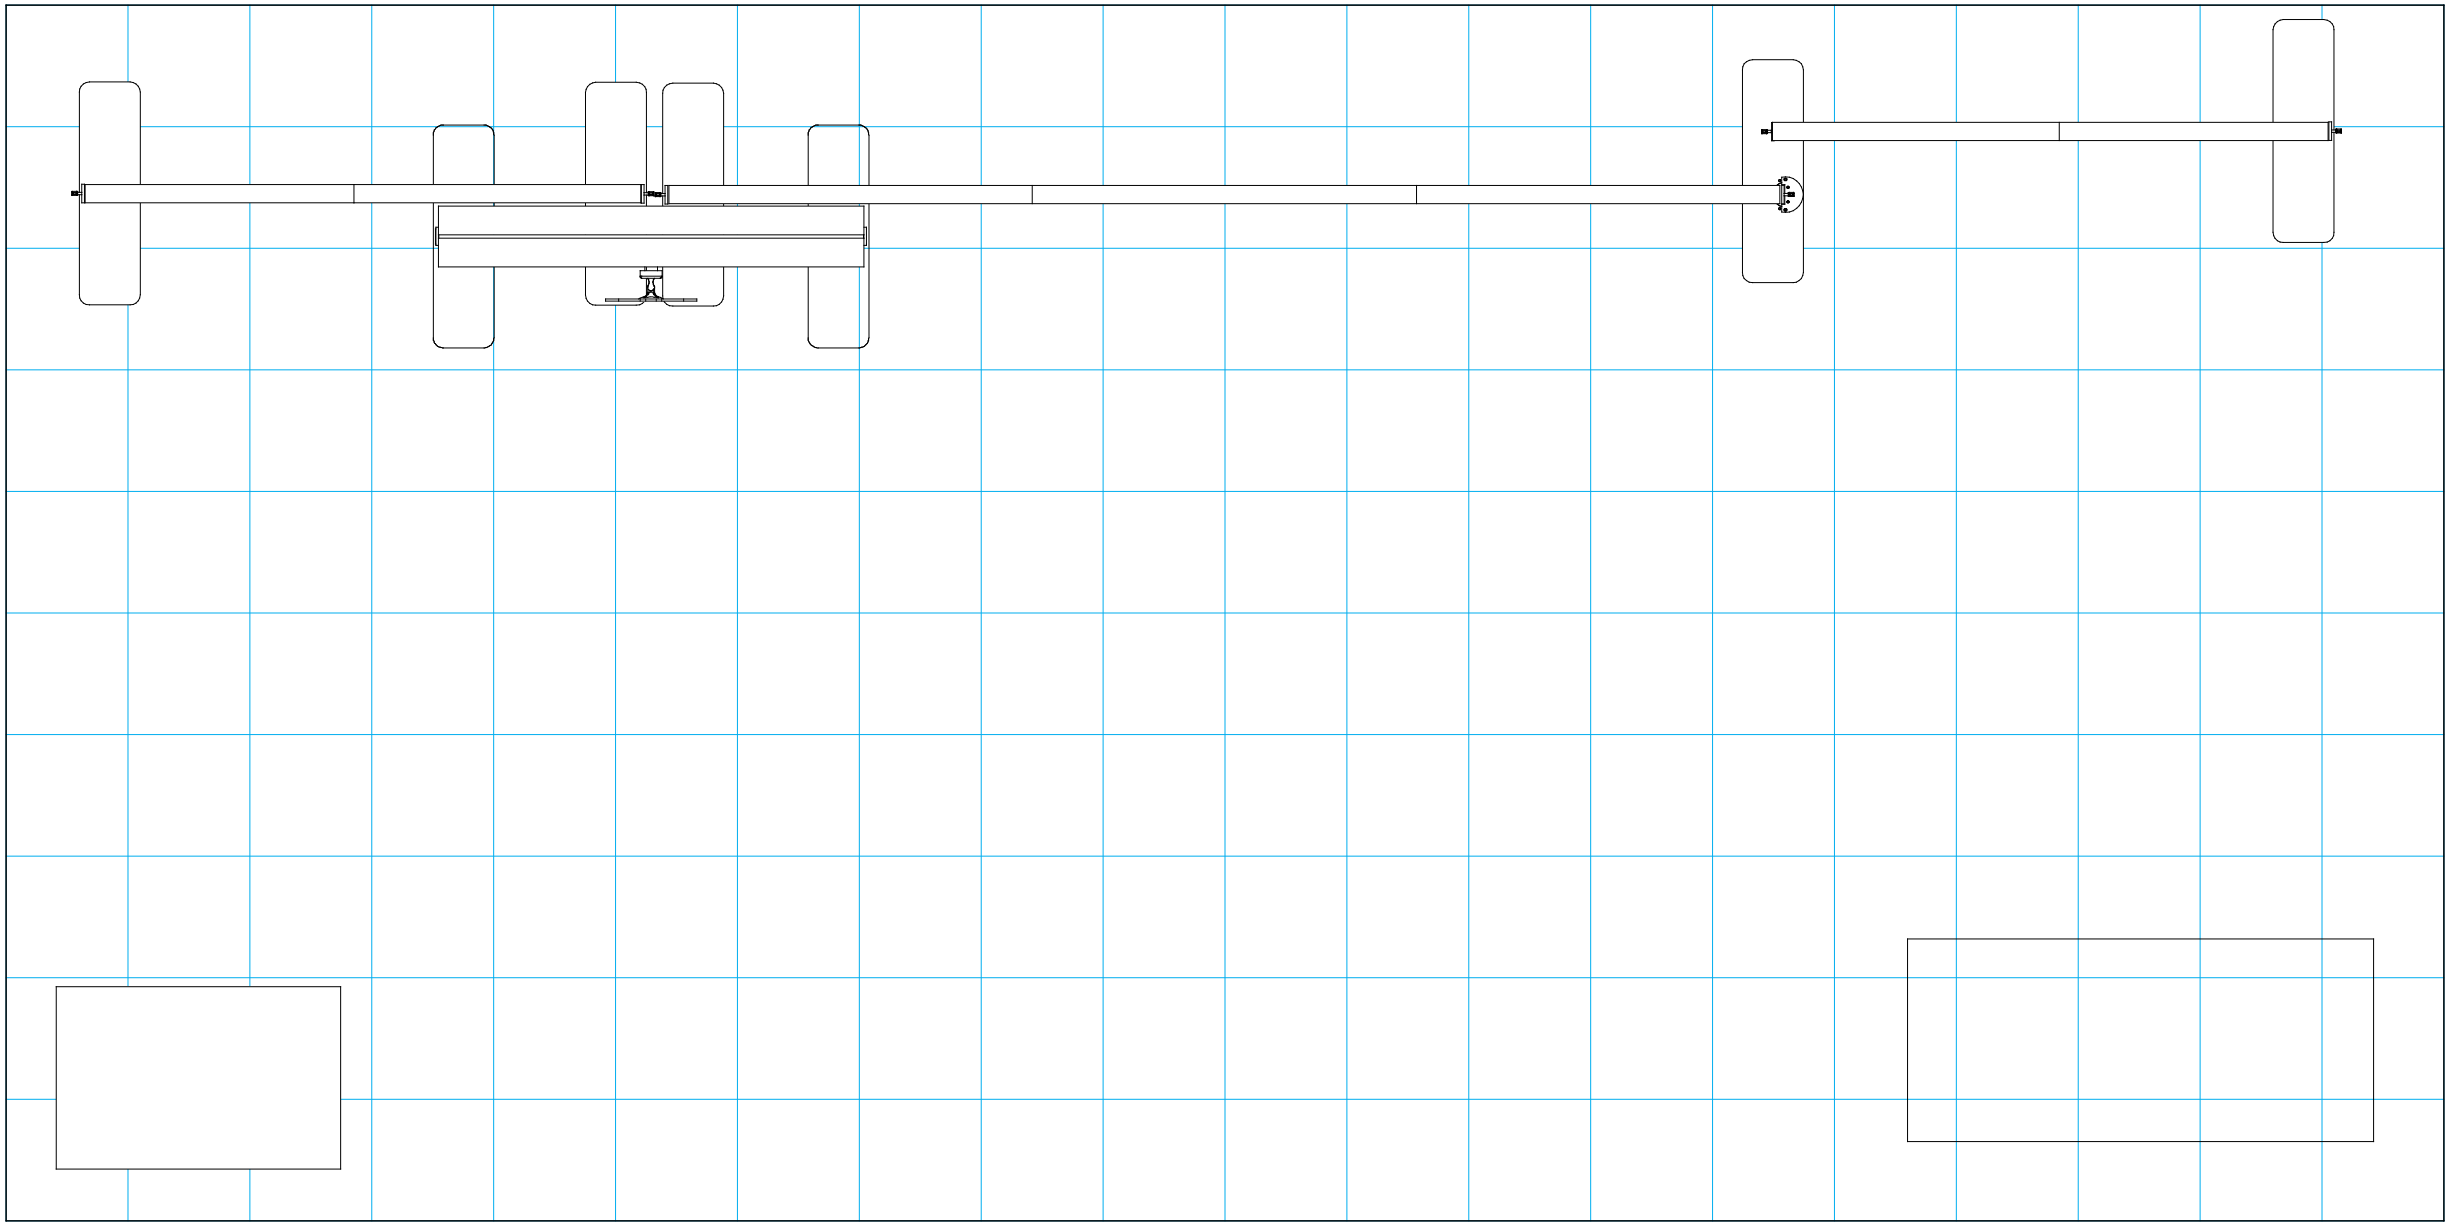

***SETUP INSTRUCTIONS***



 = 1 sq ft

## General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

## Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts:  
Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.  
**Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials.  
All provided packing materials are for ease of repacking & component protection.

## Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

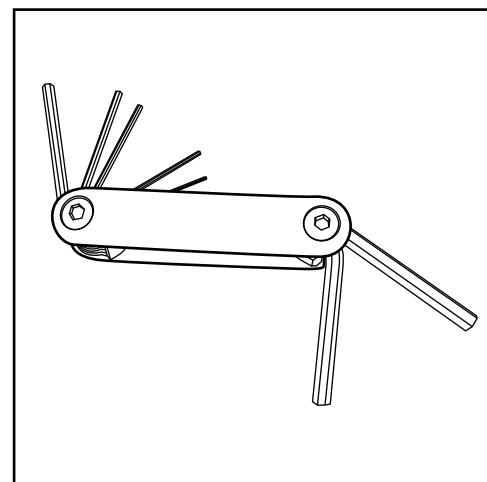


Hex Tool - Essential for Assembly

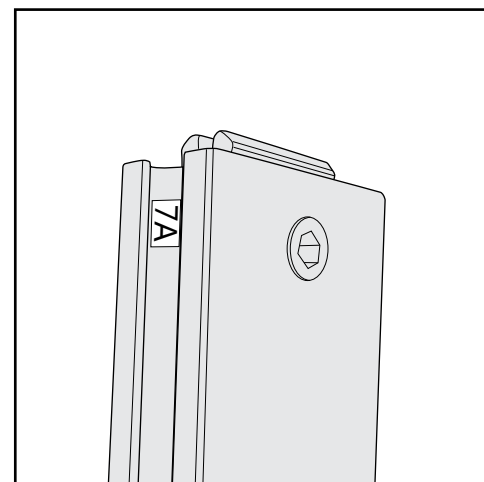


Part Identification - Numbering

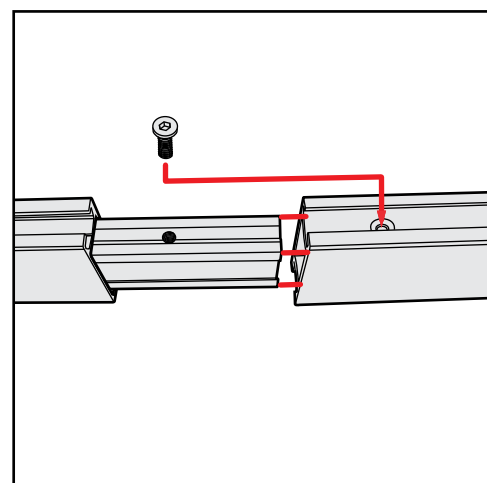


Spline Connection

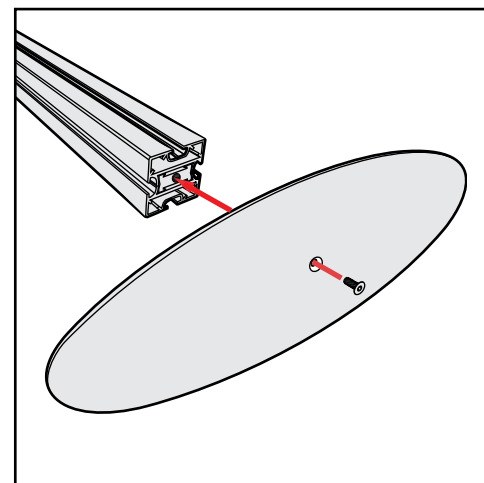

Base Plate & Extrusion Connection

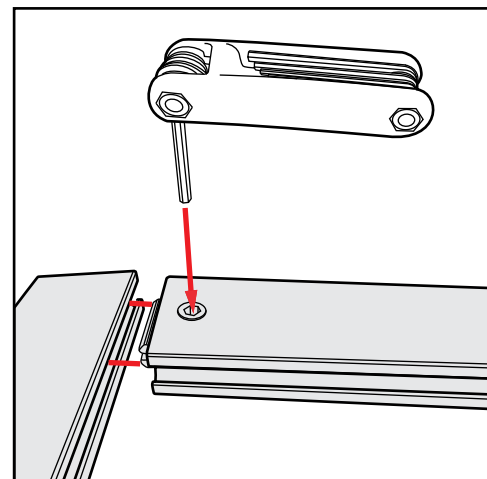

Extrusion & Lock Connection

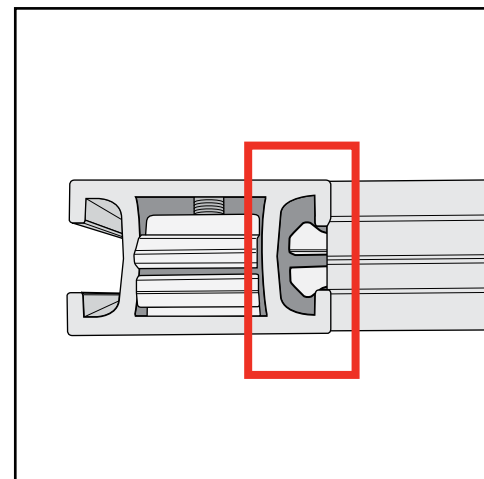

Engaged Lock



# WARNING



DO NOT USE POWER TOOLS



LADDERS OR LIFTS  
MAY BE REQUIRED




ALL CONNECTIONS MUST  
BE TIGHTLY SECURED


## Straight Connection

When assembling frame, first attach all **straight connectors**, then attach **corner connectors**.

- 1) Place extrusions end-to-end.
- 2) Loosen all knobs, then slide **straight connectors** across the seam of extrusions.
- 3) Tighten all knobs to secure connection.

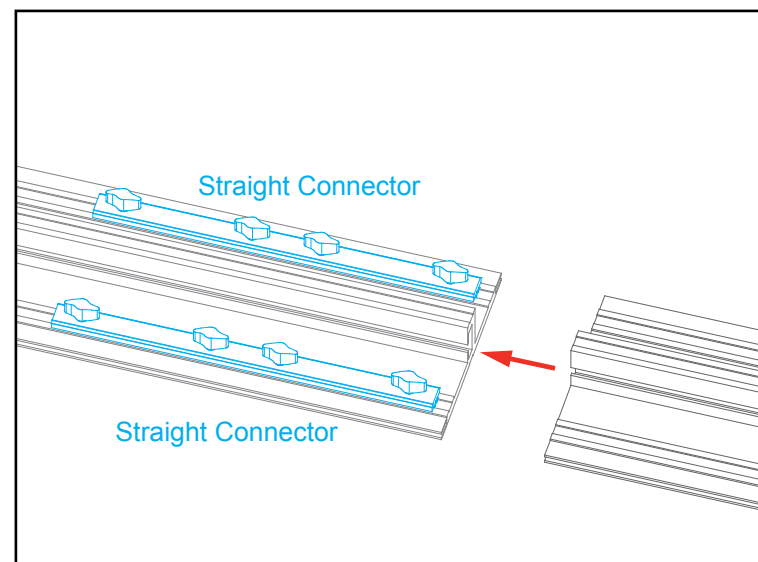

Slide both connectors across seam of extrusions.  
Tighten all knobs.

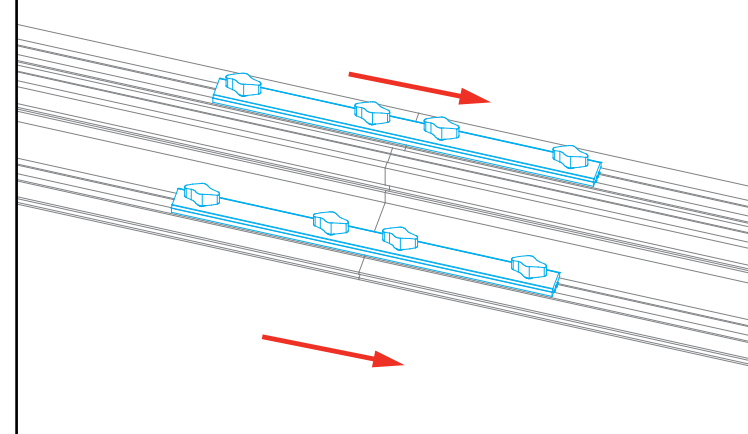

All knobs must be tightened securely to ensure a proper connection.

## Disassembly

- 1) Loosen all knobs.
- 2) Slide connectors off of one extrusion.
- 3) Tighten knobs to prevent loss during packing & shipping.


Keep straight connectors in groove of extrusion. Do not remove connectors during disassembly.

## Corner Connection


- 1) Loosen knobs, then slide vertical extrusions onto **corner connectors** of **lower** horizontal extrusion.
- 2) Slide **corner connectors** of **upper** horizontal extrusion into grooves of vertical extrusions.
- 3) Tighten all knobs to secure connection.

## Disassembly

- 1) Loosen knobs on vertical extrusions.
- 2) Slide the vertical extrusions off of **corner connectors** on lower and upper horizontal extrusions.

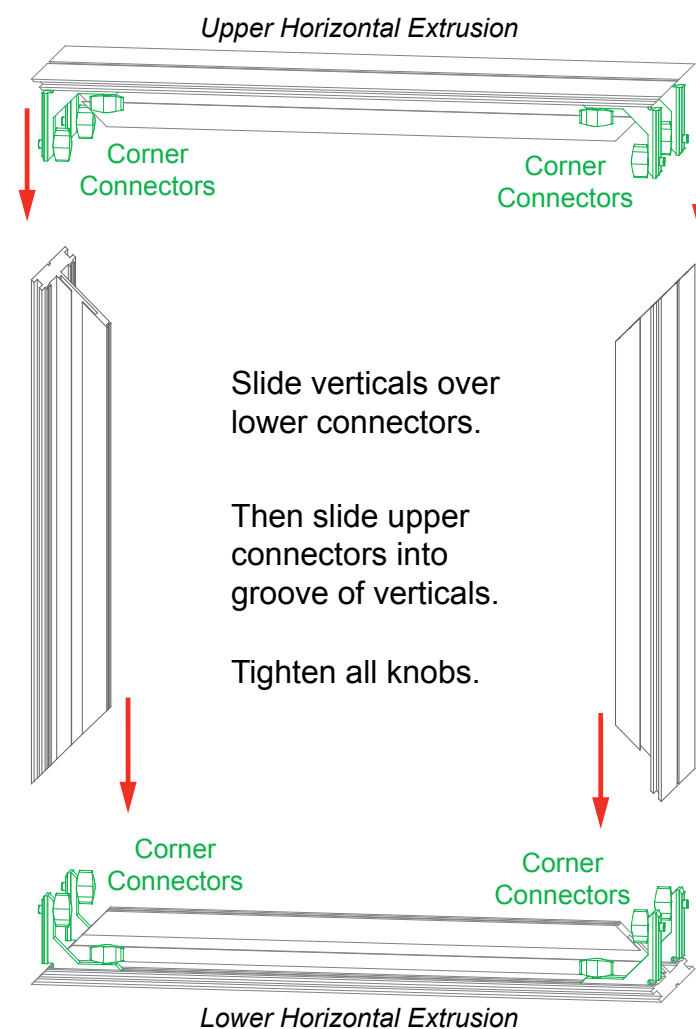


Adjust connectors if necessary to prevent gaps in connection.

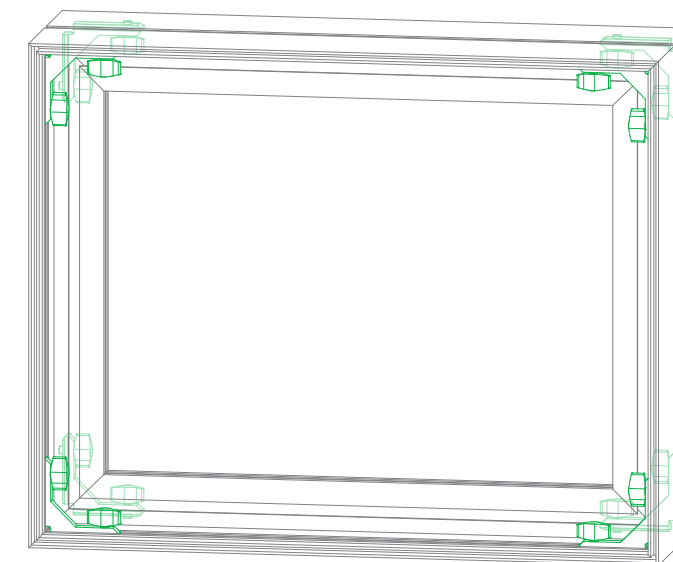

COMPLETED ASSEMBLY

All knobs must be tightened securely to ensure a proper connection.


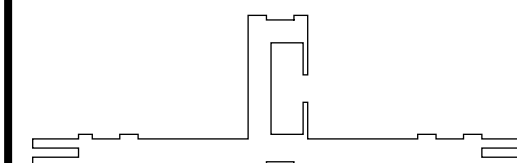


CEI152 Profile

# Straight Connection

When assembling frame, first attach all **straight connectors**, then attach **corner connectors**.

- 1) Place extrusions end-to-end.
- 2) Loosen all knobs, then slide **straight connector** across the seam of extrusions.
- 3) Tighten all knobs to secure connection.

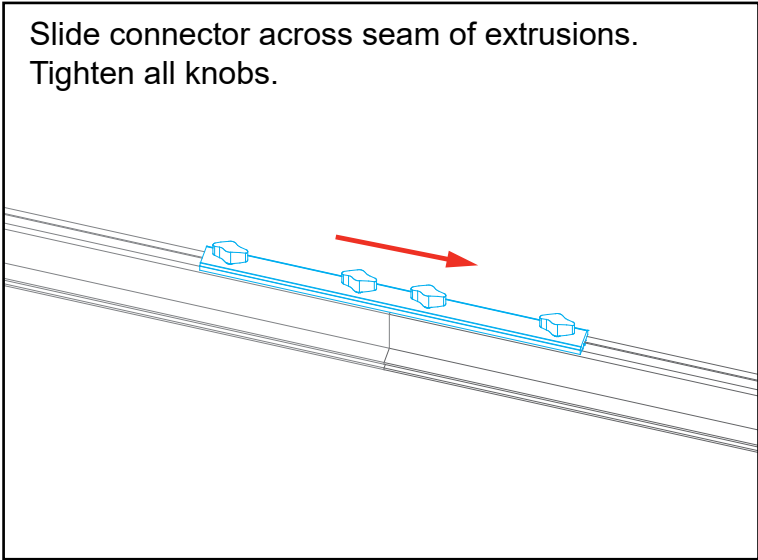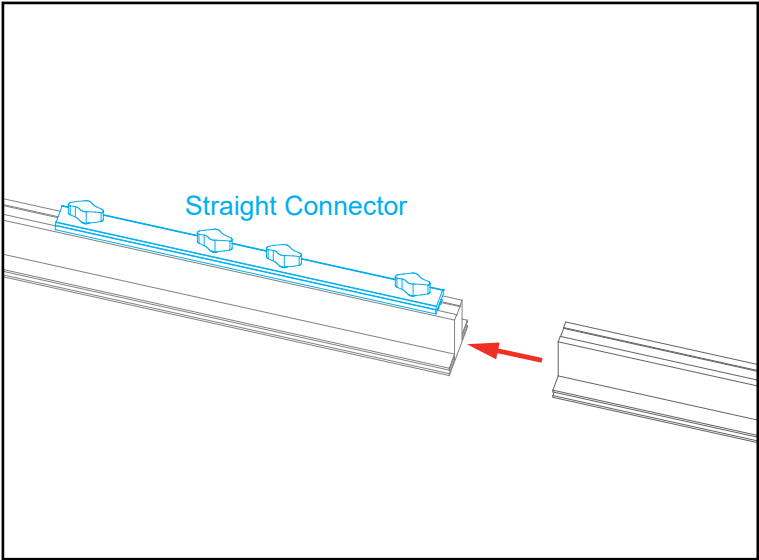

# Disassembly

- 1) Loosen all knobs.
- 2) Slide connectors off of one extrusion.
- 3) Tighten knobs to prevent loss during packing & shipping.

Keep straight connectors in groove of extrusion. Do not remove connectors during disassembly.


All knobs must be tightened securely to ensure a proper connection.

# Corner Connection


- 1) Loosen knobs, then slide vertical extrusions onto **corner connectors** of **lower** horizontal extrusion.
- 2) Slide **corner connectors** of **upper** horizontal extrusion into grooves of vertical extrusions.
- 3) Tighten all knobs to secure connection.

# Disassembly

- 1) Loosen knobs on vertical extrusions.
- 2) Slide the vertical extrusions off of **corner connectors** on lower and upper horizontal extrusions.

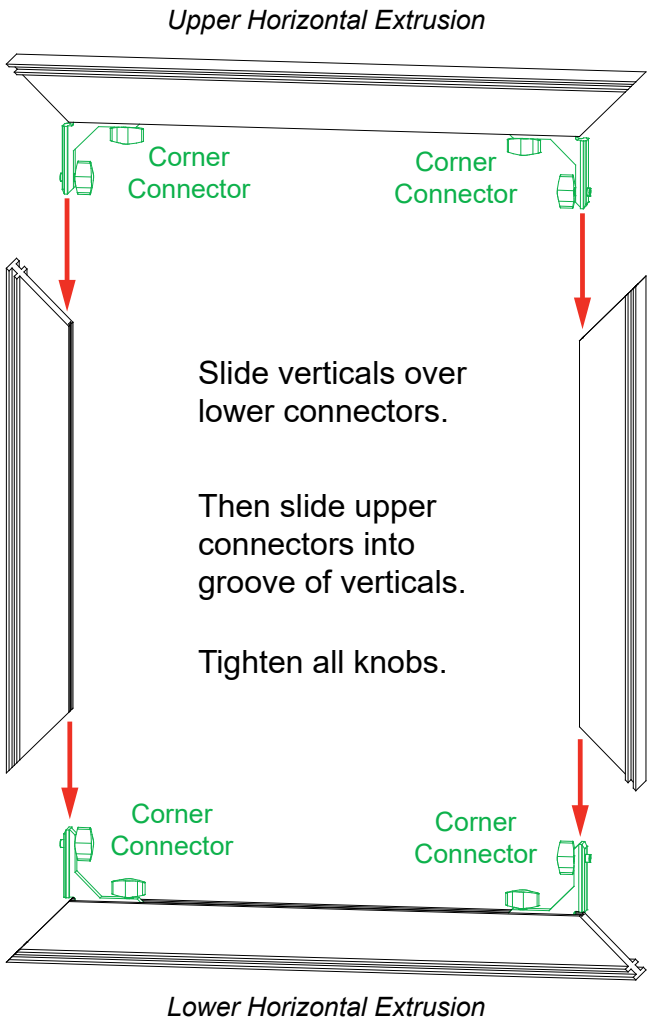


Adjust connectors if necessary to prevent gaps in connection.

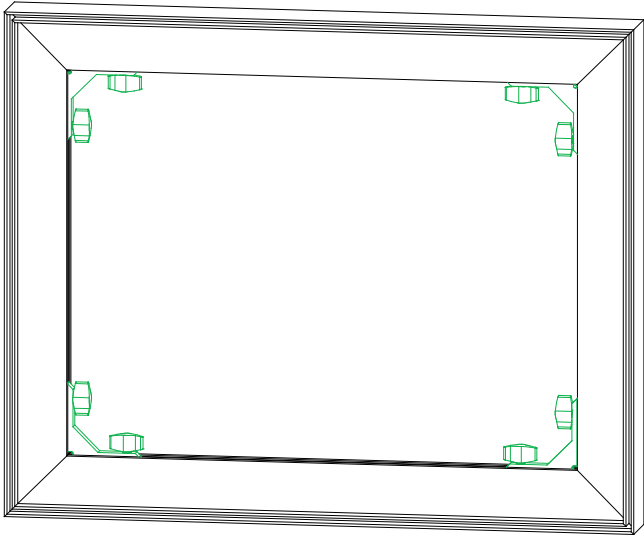

COMPLETED ASSEMBLY

All knobs must be tightened securely to ensure a proper connection.

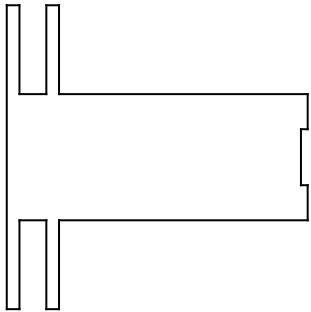


TSP49 Profile


# SEG Graphic Installation *in 3 Steps*

*The Perfect Fit*


## STEP 1: Attach Corners

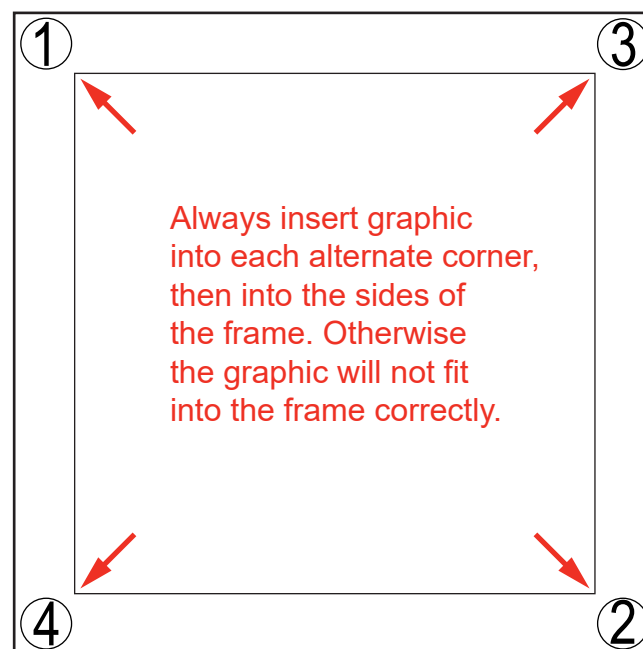

## STEP 2: Attach Middle

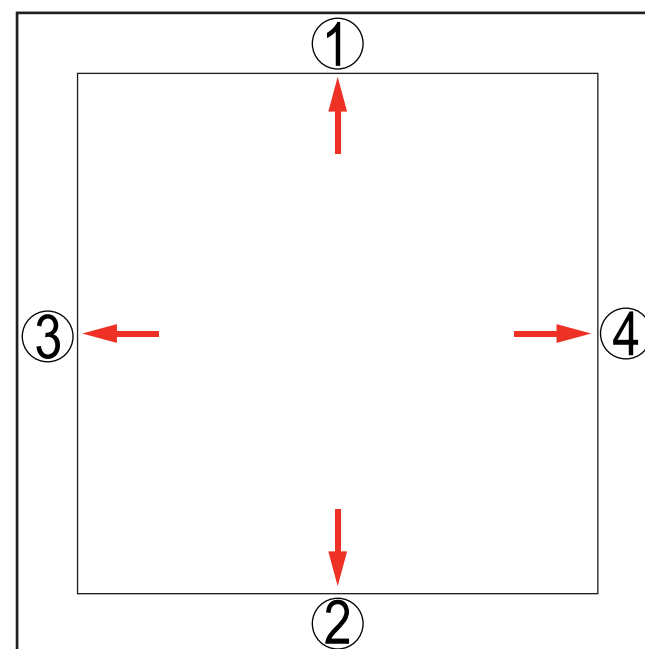

## STEP 3: Attach Sides

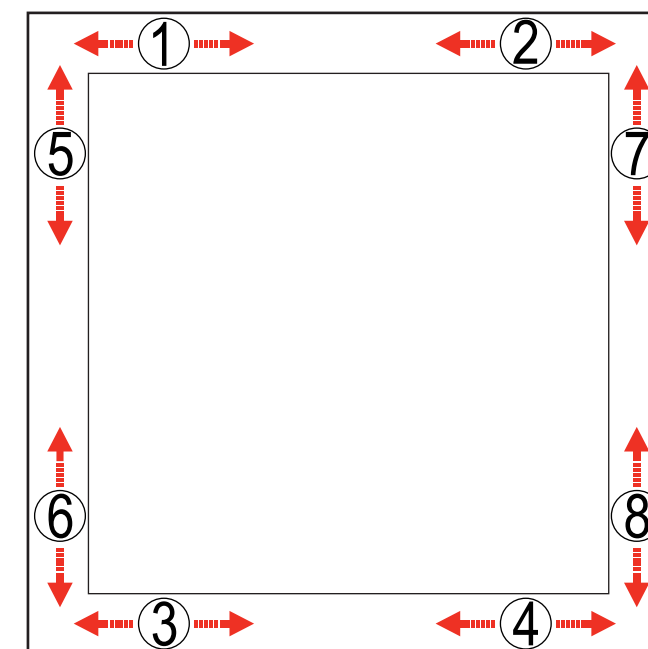

Insert narrow side of silicone welt into the channel at corner 1, with fabric to the outside.

Repeat for opposite corner 2, then corner 3, then corner 4.

Once corners are attached, press the middle of edge 1 into the channel. Then press middle of edge 2 into the channel on opposite side.

Repeat with edge 3 & 4.

Once the middle of sides are attached, fully press the silicone welt into the channel, between center and corner at location 1. Repeat the process between center and corner at location 2.

Do the same for welt on opposite side, at locations 3 & 4. Then repeat for locations 5 & 6 and 7 & 8.

Once the welt is fully inserted on all sides, smooth out edges as needed for a perfect fit.




To remove the graphic from the frame, locate the fabric **pull tab**. Gently pull on the tab to remove the graphic.

Install video:







Top View of Each Level

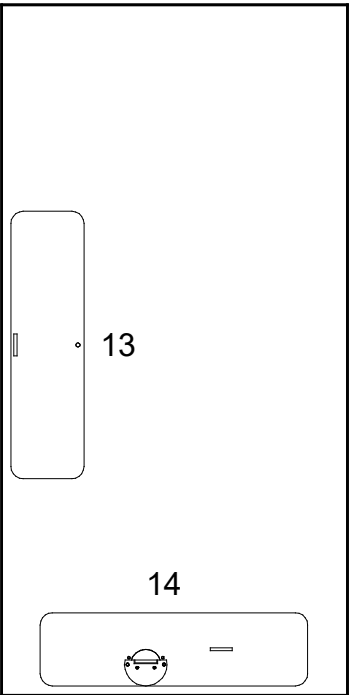


Level 1  
*(Bottom level)*

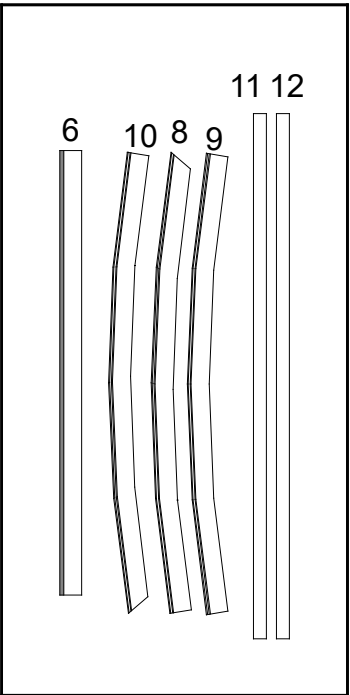


Level 2

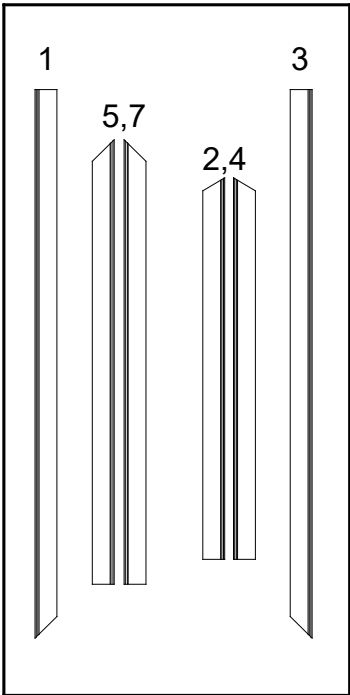


Level 3




Top View of Each Level

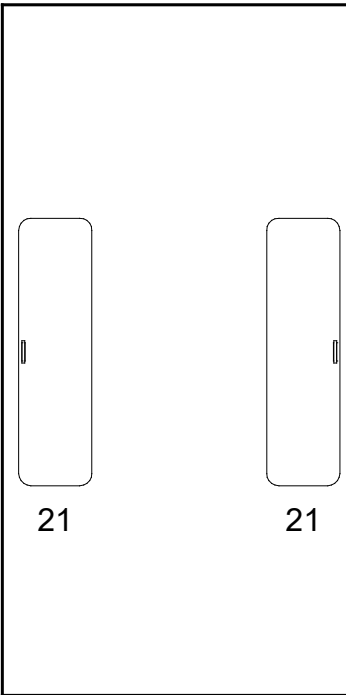


Level 1  
(Bottom level)

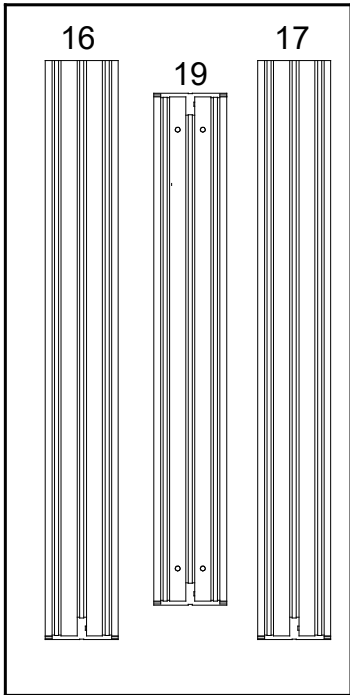



Level 2

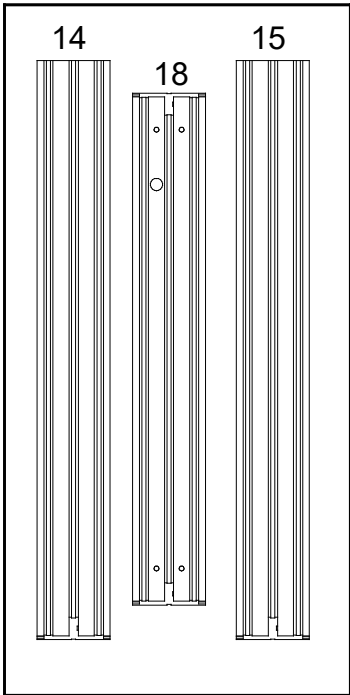

Level 3

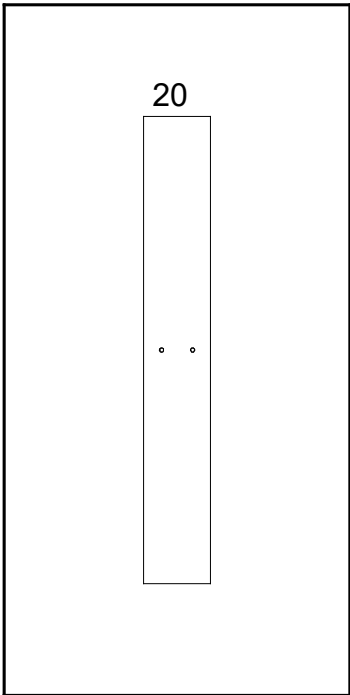


Level 4







Top View of Each Level

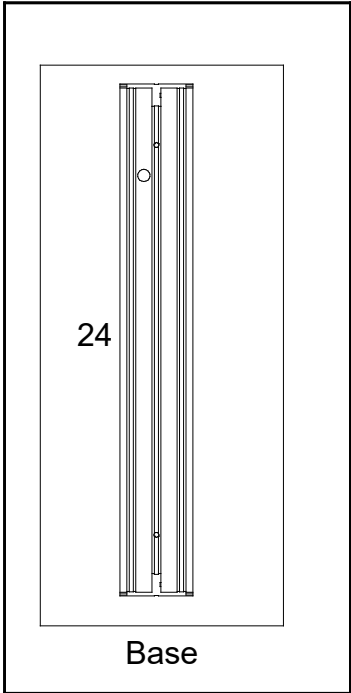



Level 1  
*(Bottom level)*

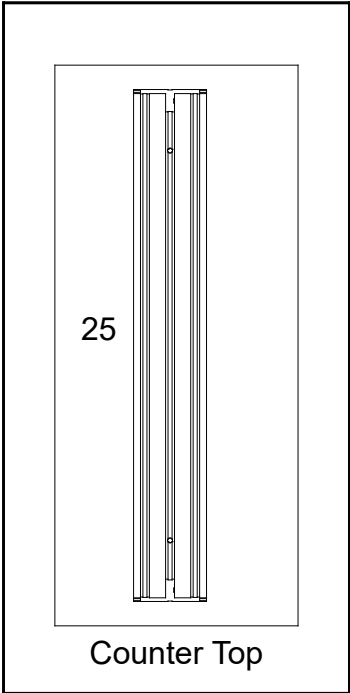


Level 2

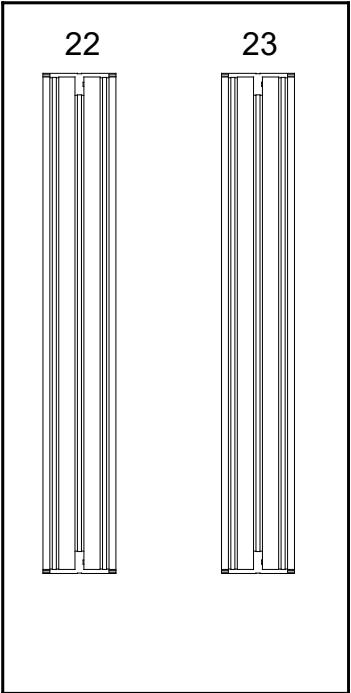


Level 3




Top View of Each Level

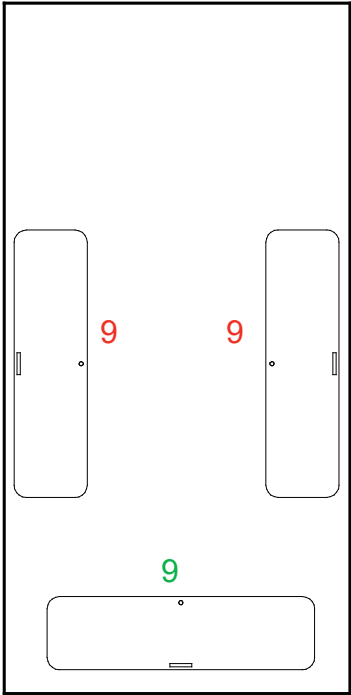


Level 1

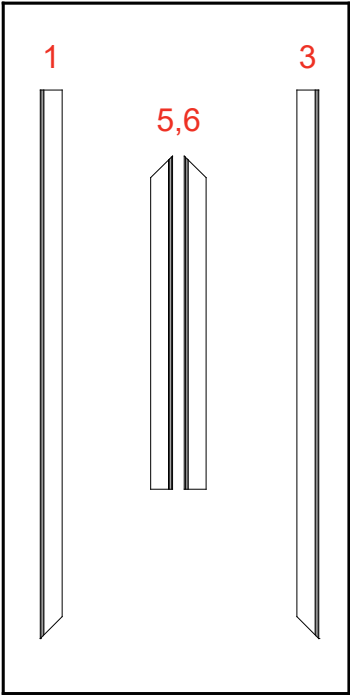


Level 2

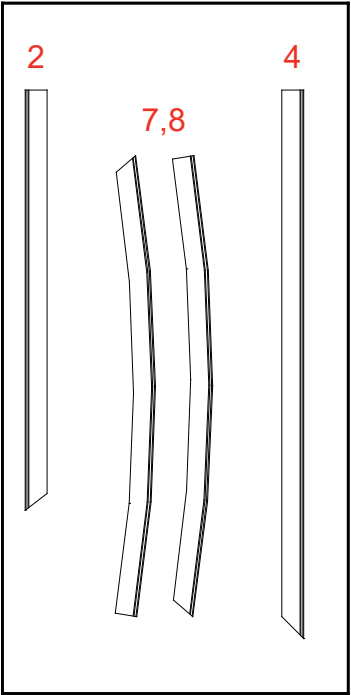



Level 3

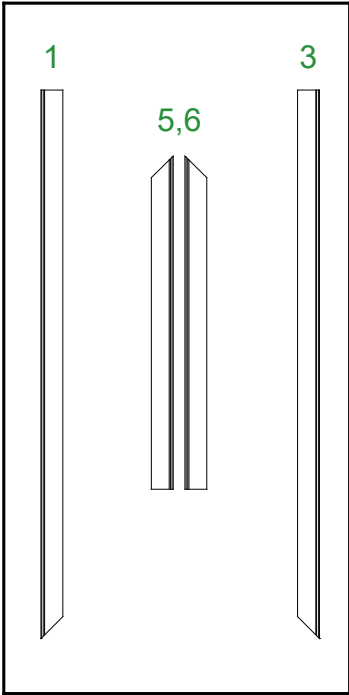


Level 4

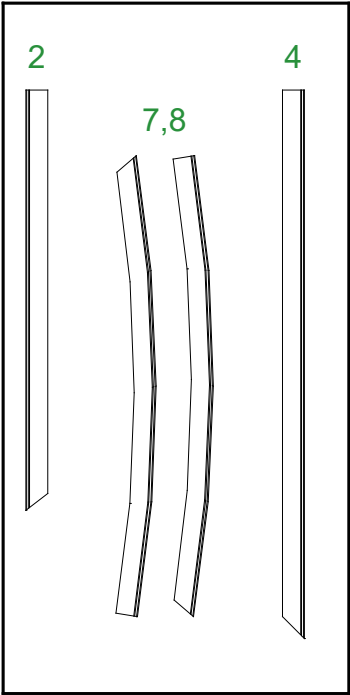


Level 5




Top View of Each Level

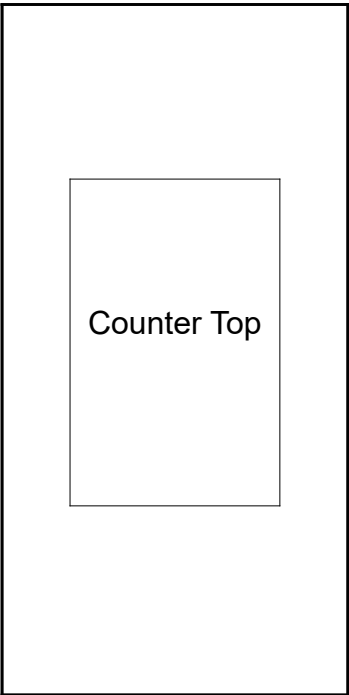


Level 1  
(Bottom level)

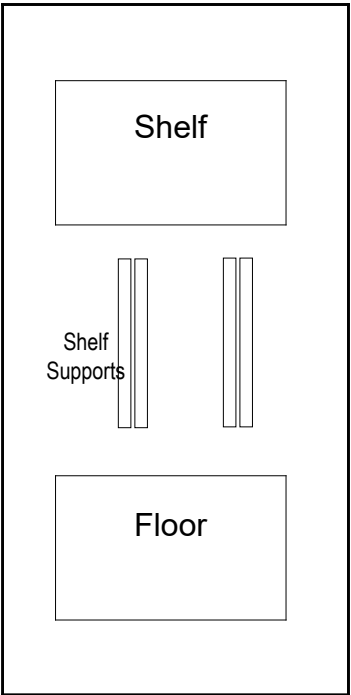


Level 2

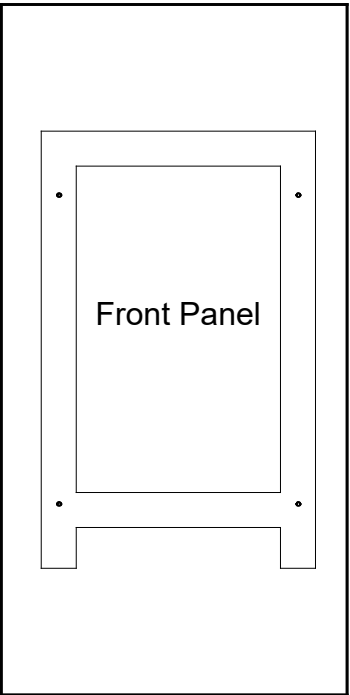

Level 3

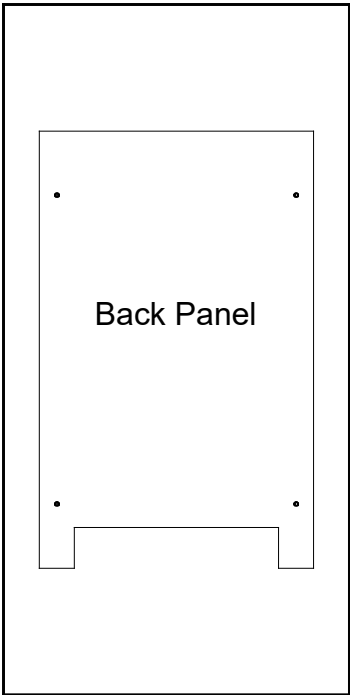

Level 4

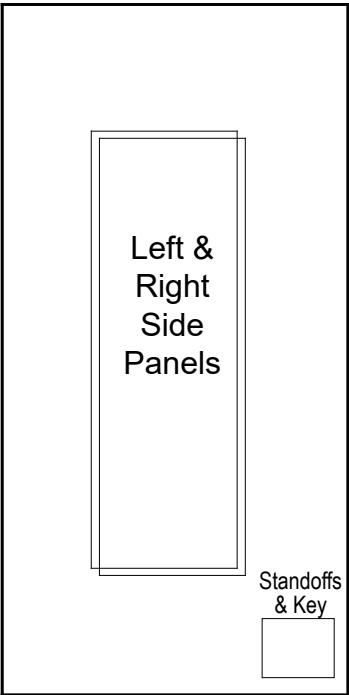


Level 5

| Item | Qty. | Description                                |
|------|------|--------------------------------------------|
| 1    | 1    | 45"h TSP49 Vertical Extrusion              |
| 2    | 1    | 31.091"h TSP49 Vertical Extrusion          |
| 3    | 1    | 45"h TSP49 Vertical Extrusion              |
| 4    | 1    | 31.091"h TSP49 Vertical Extrusion          |
| 5    | 1    | 36.467"w TSP49 Horizontal Extrusion        |
| 6    | 1    | 36.467"w TSP49 Horizontal Extrusion        |
| 7    | 1    | 36.467"w TSP49 Horizontal Extrusion        |
| 8    | 1    | 38.019"w TSP49 curved Horizontal Extrusion |
| 9    | 1    | 38.019"w TSP49 curved Horizontal Extrusion |
| 10   | 1    | 38.019"w TSP49 curved Horizontal Extrusion |
| 11   | 1    | 45.209"h Z45 Vertical Extrusion            |
| 12   | 1    | 41.209"h Z45 Vertical Extrusion            |
| 13   | 1    | 6" x 22" End Base Plate w/ foot            |
| 14   | 1    | 6" x 22" Base Plate w/ flange (right)      |

Steps:

Refer to the *Tool-less Frame Assembly* general information page.

- 1) Assemble vertical extrusions [1-2], [3-4], [11-12] & horizontals [5-6-7], [8-9-10] together, using **Tool-less Spline connectors** labeled [X] & [Y].
- 2) Connect vertical assemblies [1/2], [3/4] between horizontal assemblies [5/6/7], [8/9/10], using **Tool-less Corner Connectors** labeled [A] & [B].
- 3) Install Base Plates [13] & [14] to bottom corners of frame assembly as shown. See **Left Base Plate Attachment** & **Right Base Plate Attachment** details.
- 4) Lift frame to upright position, then connect vertical assembly [11/12] between horizontal assemblies [5/6/7], [8/9/10] using **Connection Lock w/ Knob**.

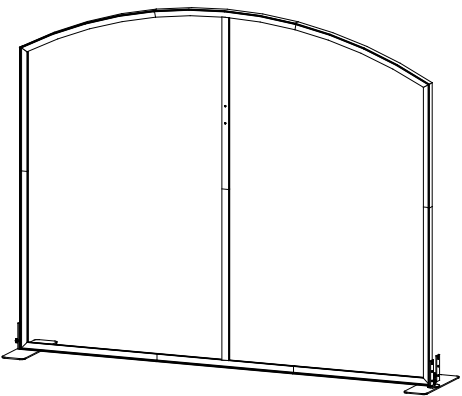


When assembled

Assemble frame flat on ground.

**\* Tool-less Spline Connector**

1. Place extrusions end-to-end.

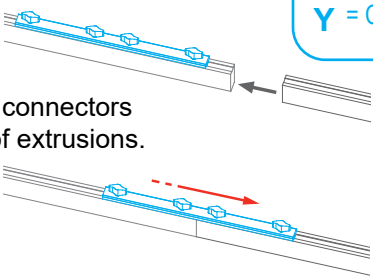


3. Tighten all knobs to secure connection.

X = Straight spline  
Y = Curved spline


**\* Tool-less Corner Connector**

1. Slide extrusion onto Corner Connector.
2. Tighten all knobs to secure connection.

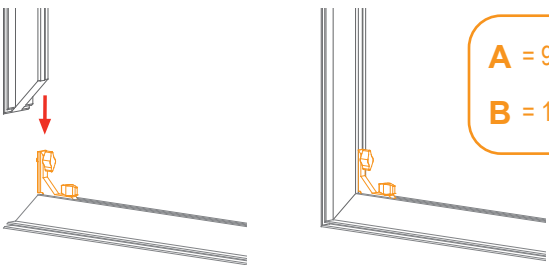


A = 90° Connector  
B = 117° Connector

Keep corner connectors attached to horizontal extrusions.

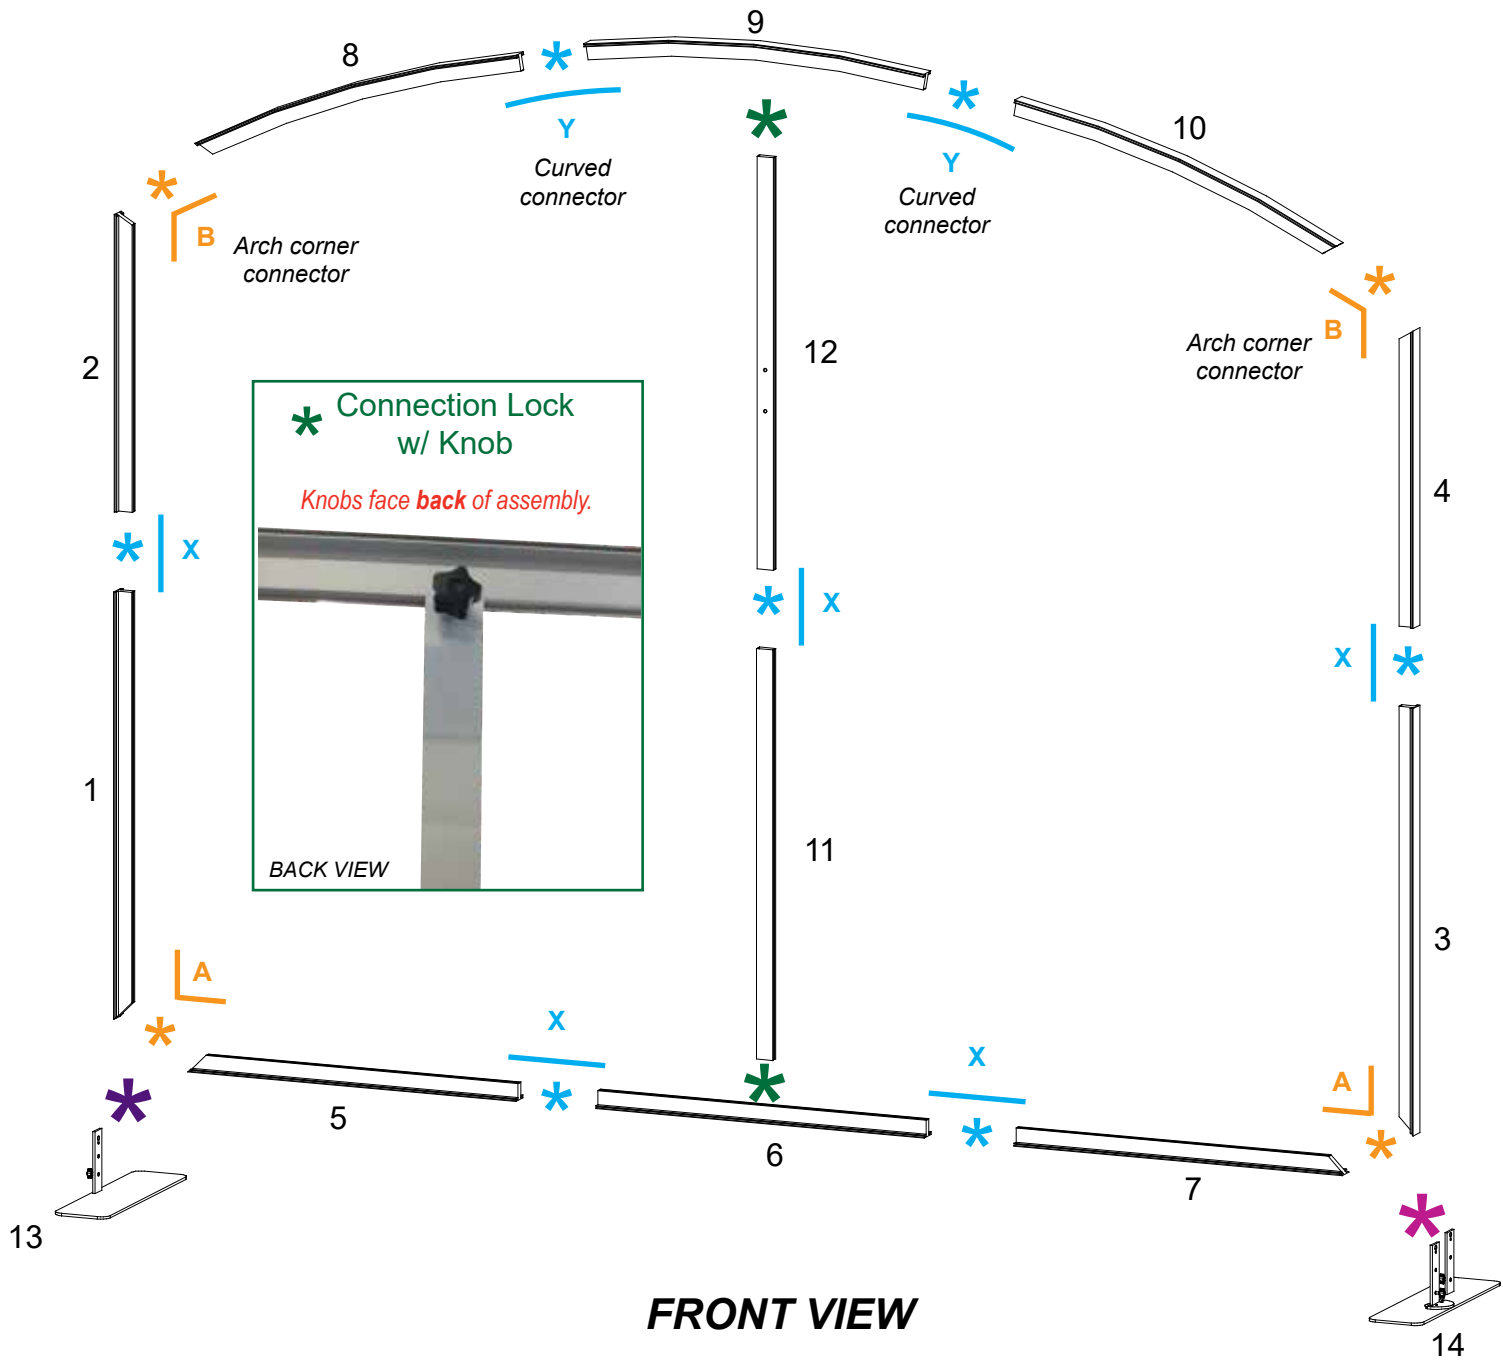


**\* Left Base Plate Attachment**

- 1) Place key hole over bolt on panel & slide down.
- 2) Twist knob to secure connection.

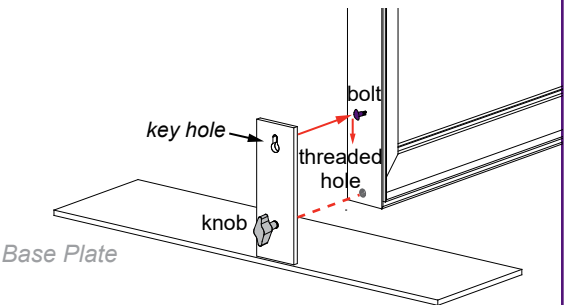

**\* Right Base Plate Attachment**

- 1) Place key hole over bolt on panel & slide down.
- 2) Twist knob to secure connection.

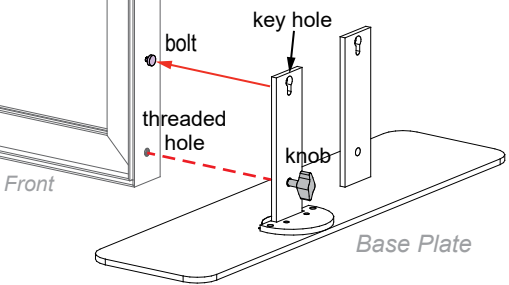


| Item | Qty. | Description                                |
|------|------|--------------------------------------------|
| 1    | 1    | 45"h TSP49 Vertical Extrusion              |
| 2    | 1    | 31.305"h TSP49 Vertical Extrusion          |
| 3    | 1    | 45"h TSP49 Vertical Extrusion              |
| 4    | 1    | 45"h TSP49 Vertical Extrusion              |
| 5    | 1    | 27.35"w TSP49 Horizontal Extrusion         |
| 6    | 1    | 27.35"w TSP49 Horizontal Extrusion         |
| 7    | 1    | 28.514"w TSP49 curved Horizontal Extrusion |
| 8    | 1    | 28.514"w TSP49 curved Horizontal Extrusion |
| 9    | 2    | 6" x 22" End Base Plate w/ foot            |

Steps:

Refer to the Tool-less Frame Assembly general information page.

- 1) Assemble vertical extrusions [1-2], [3-4] & horizontal extrusions [5-6], [7-8] together, using Tool-less Spline connectors labeled [X] & [Y].
- 2) Connect vertical assemblies [1/2], [3/4] between horizontal assemblies [5/6], [7/8], using Tool-less Corner Connectors labeled [A] & [B].
- 3) Install Base Plates [9] to bottom corners of frame assembly as shown. See Base Plate Attachment detail.

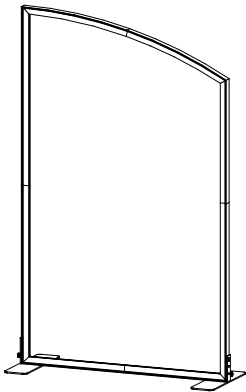


When assembled


Assemble frame flat on ground.

✱ Tool-less Spline Connector

1. Place extrusions end-to-end.



2. Slide tool-less connectors across seam of extrusions.





3. Tighten all knobs to secure connection.

X = Straight spline  
Y = Curved spline

✱ Tool-less Corner Connector


1. Slide extrusion onto Corner Connector.

2. Tighten all knobs to secure connection.




A = 90° Connector  
B = 117° Connector

Keep corner connectors attached to horizontal extrusions.

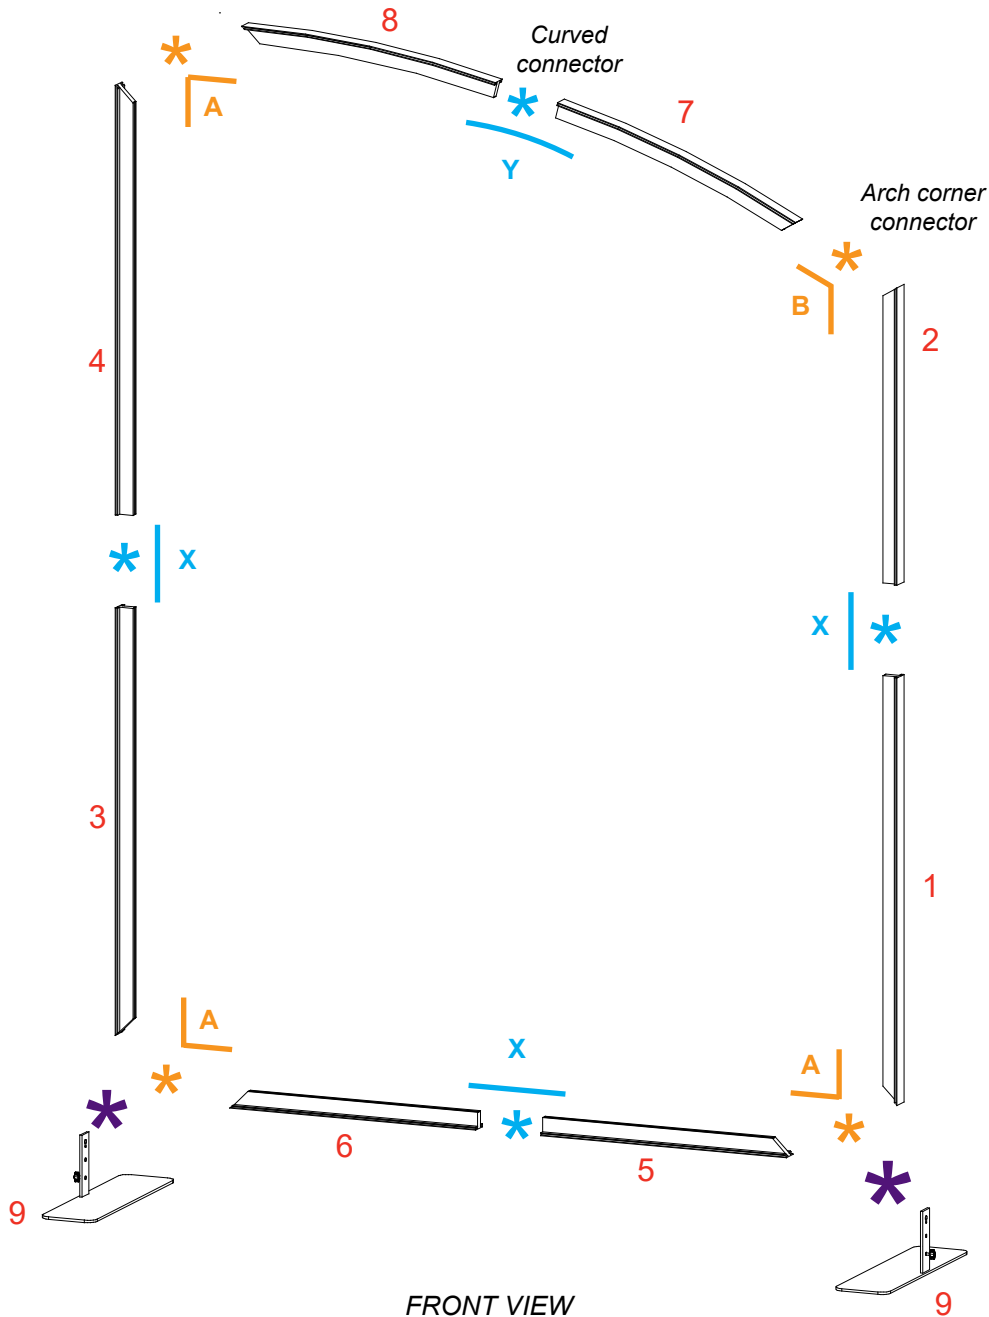

✱ Base Plate Attachment

- 1) Place key hole over bolt on panel & slide down.
- 2) Twist knob to secure connection.

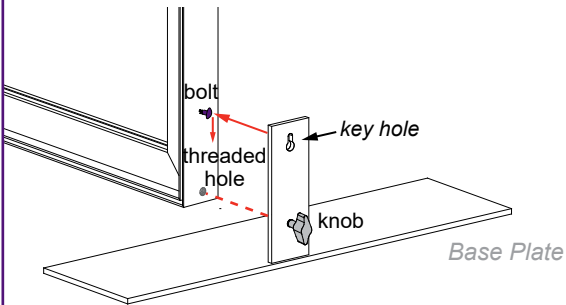


| Item | Qty. | Description                                |
|------|------|--------------------------------------------|
| 1    | 1    | 45"h TSP49 Vertical Extrusion              |
| 2    | 1    | 31.305"h TSP49 Vertical Extrusion          |
| 3    | 1    | 45"h TSP49 Vertical Extrusion              |
| 4    | 1    | 45"h TSP49 Vertical Extrusion              |
| 5    | 1    | 27.35"w TSP49 Horizontal Extrusion         |
| 6    | 1    | 27.35"w TSP49 Horizontal Extrusion         |
| 7    | 1    | 28.514"w TSP49 curved Horizontal Extrusion |
| 8    | 1    | 28.514"w TSP49 curved Horizontal Extrusion |
| 9    | 1    | 6" x 22" End Base Plate w/ foot            |

Steps:

Refer to the *Tool-less Frame Assembly* general information page.

- 1) Assemble vertical extrusions [1-2], [3-4] & horizontal extrusions [5-6], [7-8] together, using **Tool-less Spline connectors** labeled [X] & [Y].
- 2) Connect vertical assemblies [1/2], [3/4] between horizontal assemblies [5/6], [7/8], using **Tool-less Corner Connectors** labeled [A] & [B].
- 3) Install Base Plate [9] to bottom-right corner of frame assembly as shown. See **Base Plate Attachment** detail.

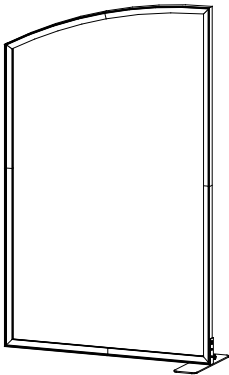


When assembled

Assemble frame flat on ground.

✱ Tool-less Spline Connector

1. Place extrusions end-to-end.

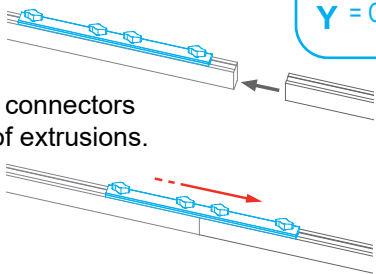


X = Straight spline  
Y = Curved spline

3. Tighten all knobs to secure connection.


✱ Tool-less Corner Connector

1. Slide extrusion onto Corner Connector.
2. Tighten all knobs to secure connection.

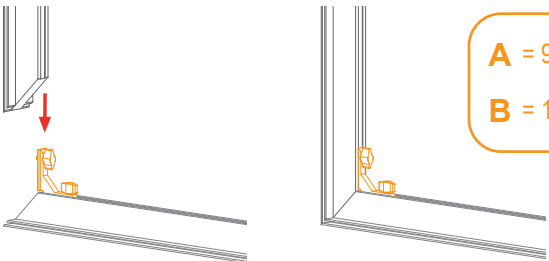

A = 90° Connector  
B = 117° Connector


Keep corner connectors attached to horizontal extrusions.

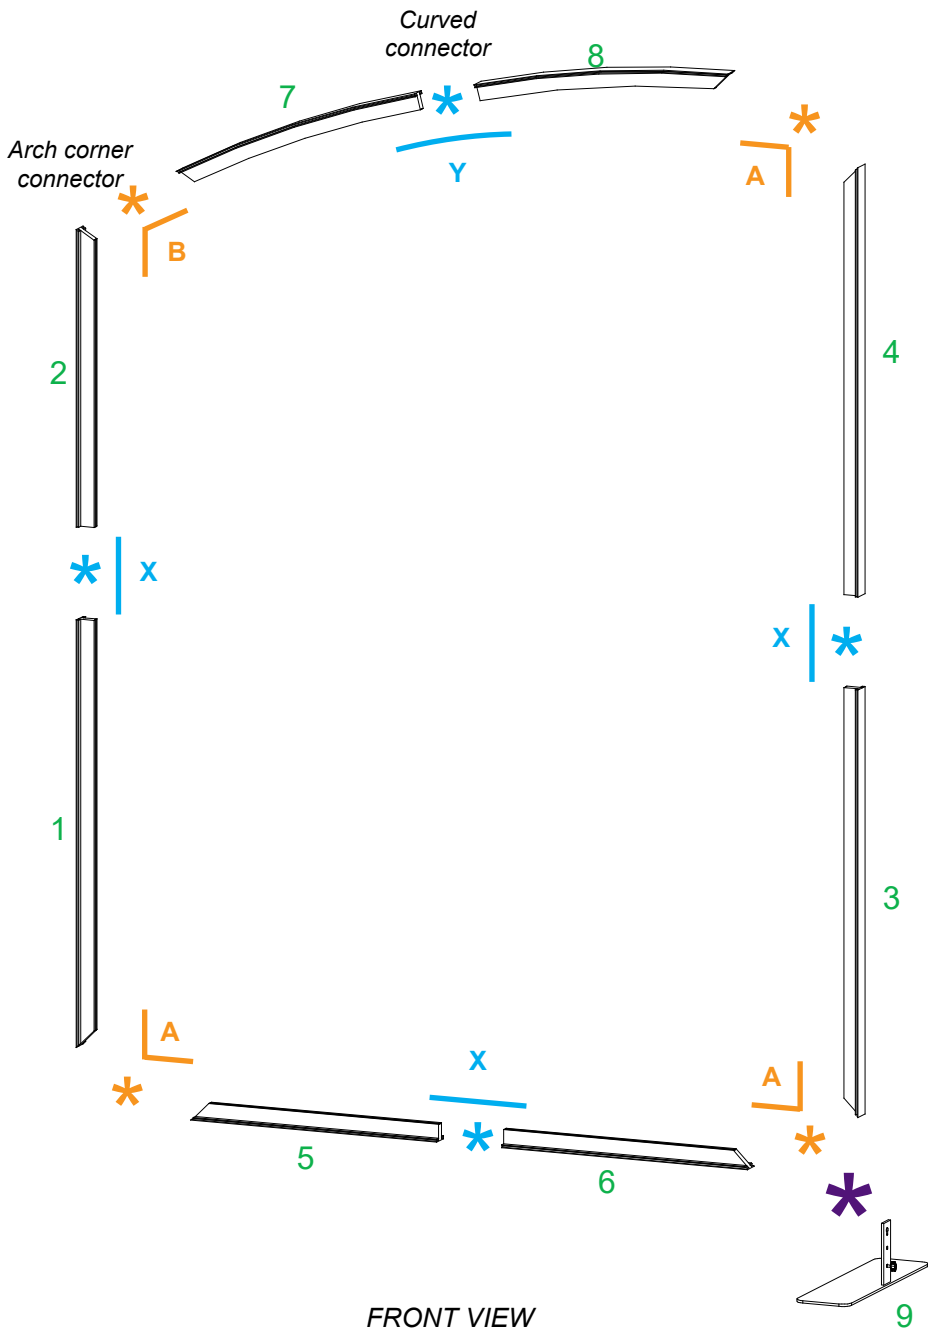

FRONT VIEW

✱ Base Plate Attachment


- 1) Place key hole over bolt on panel & slide down.
- 2) Twist knob to secure connection.

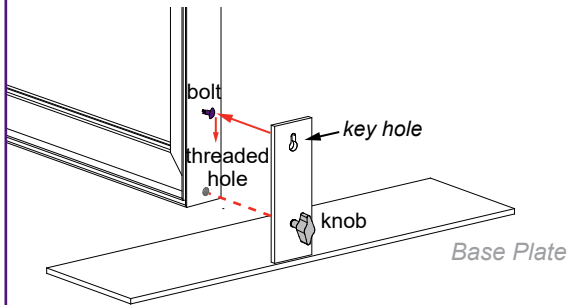





**\* Base Plate Attachment**

Place key hole over bolt on panel & slide down.  
Twist knob to secure connection.

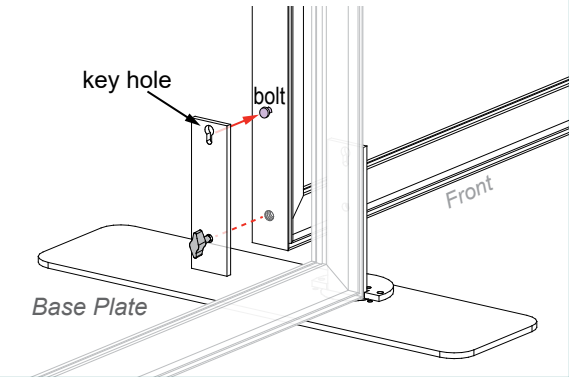

Steps:


- 1) Attach vertical of Right Frame Assembly to Base Plate of Middle Frame Assembly. See [Base Plate Connection](#) detail.
- 2) Place Left Frame Assembly next to Middle Frame Assembly as shown. *Left Frame does not attach to Middle Frame.*

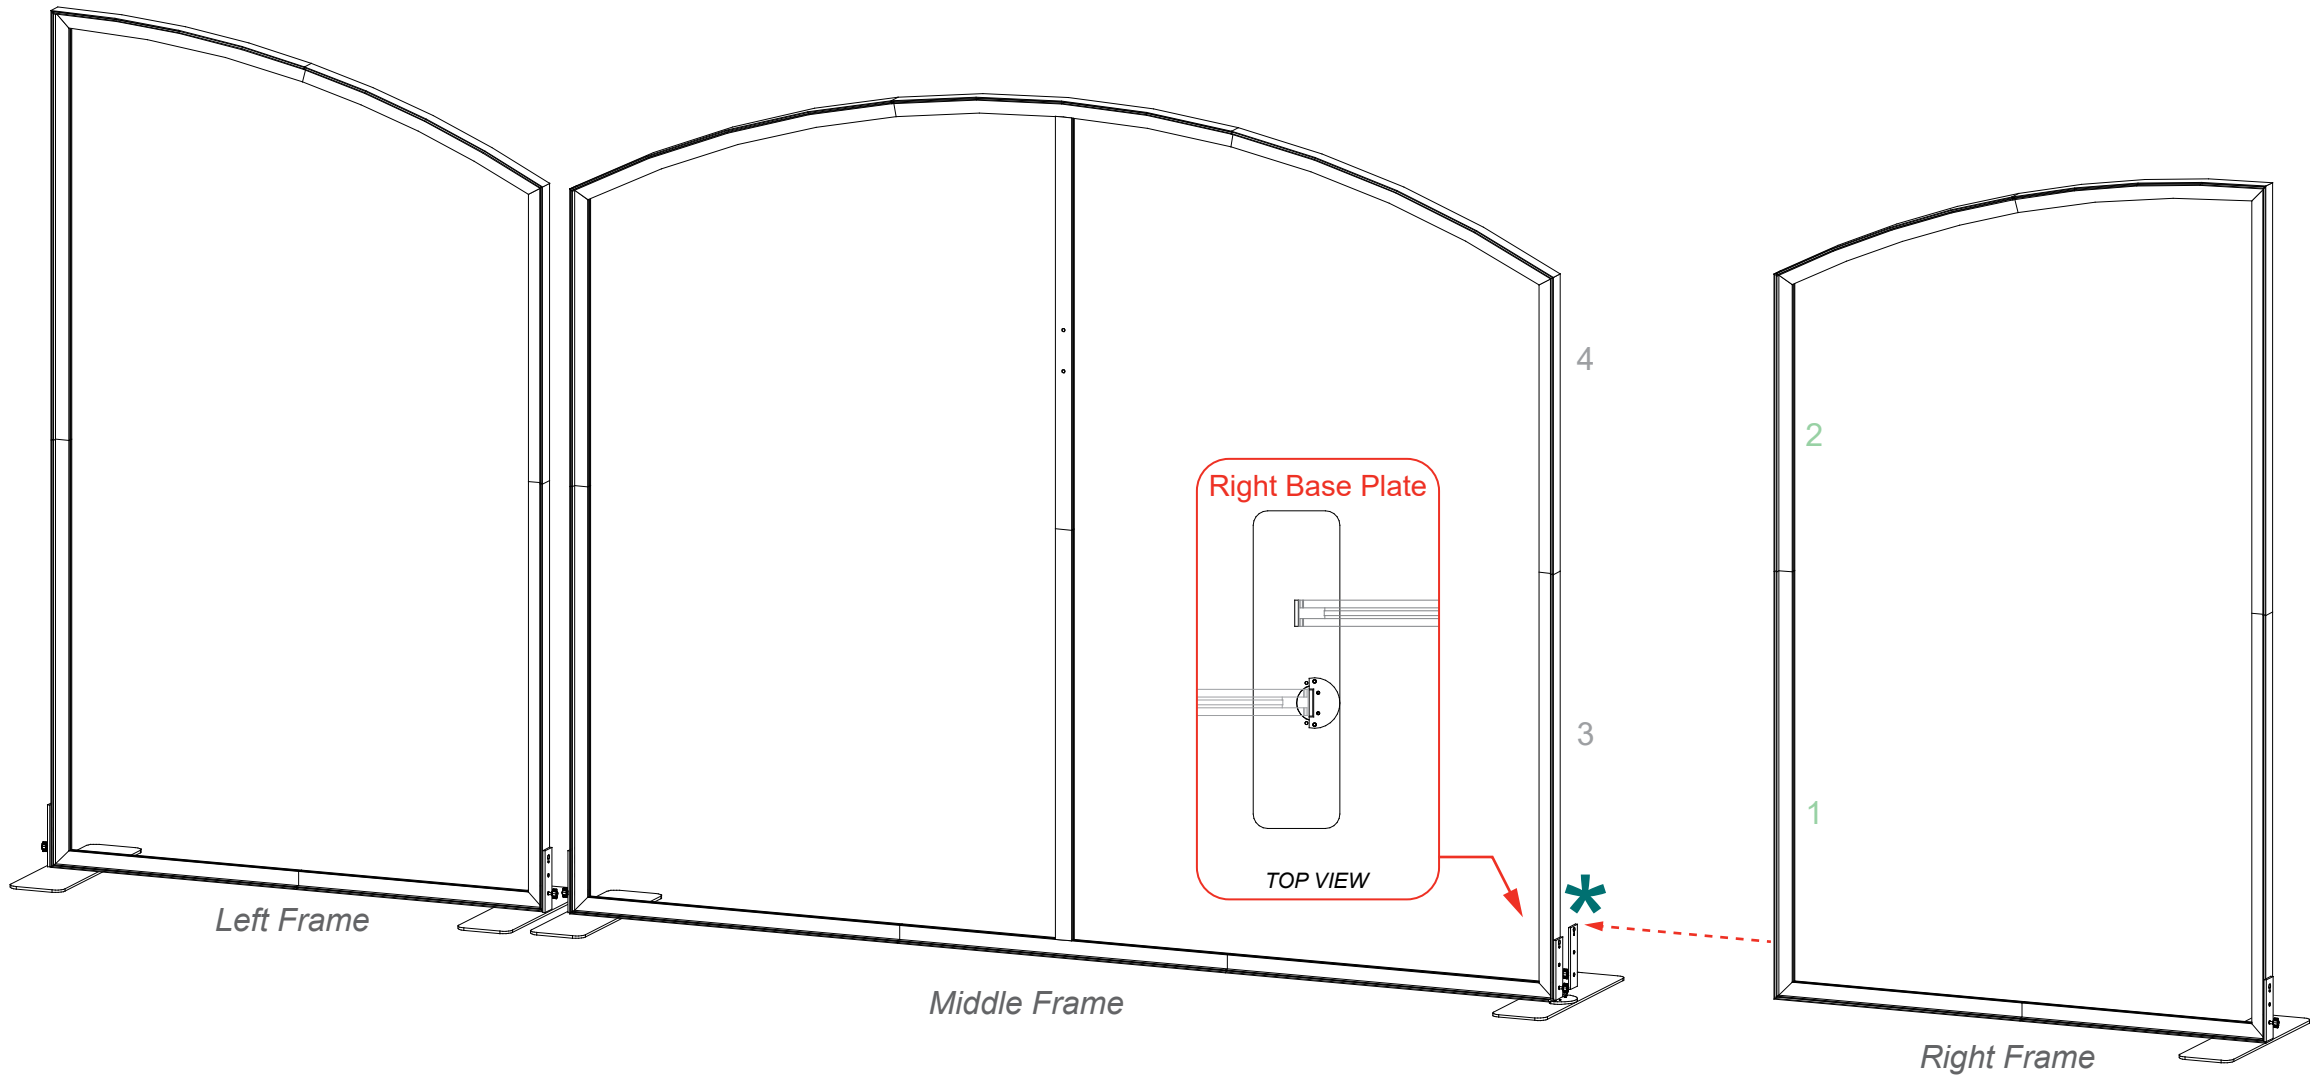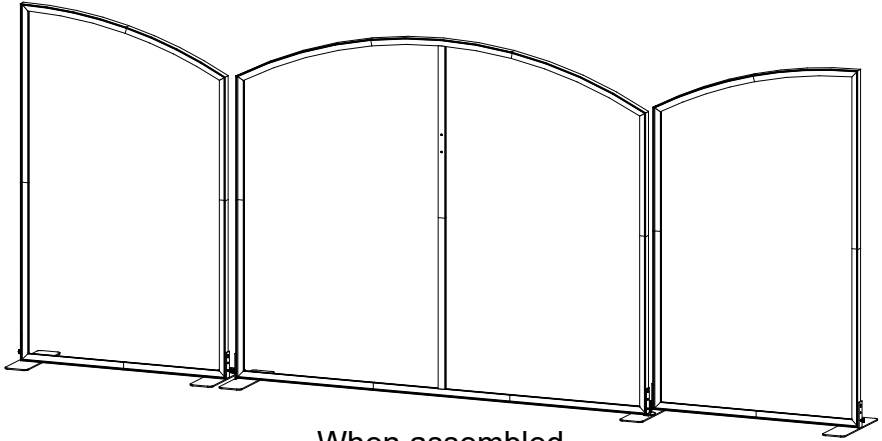

FRONT VIEW

## SEG Graphic Installation

### STEP 1: Attach Corners

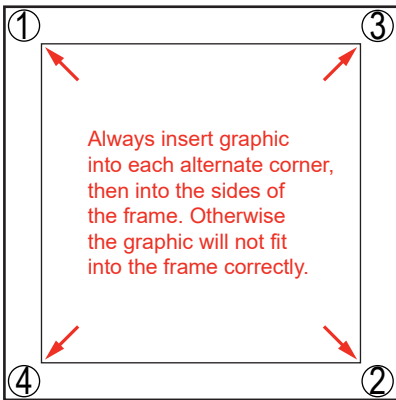


Insert narrow side of silicone welt into the channel at corner 1, with fabric to the outside.

Repeat for opposite corner 2, then corner 3, then corner 4.




### STEP 2: Attach Middle

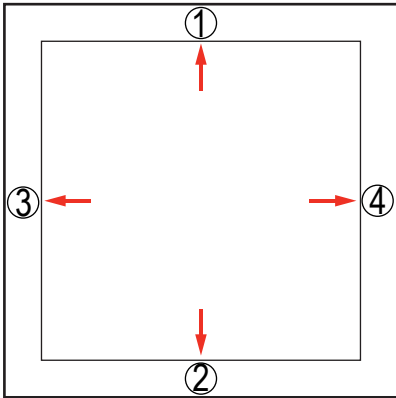

Once corners are attached, press the middle of edge 1 into the channel. Then press middle of edge 2 into the channel on opposite side.

Repeat with edge 3 & 4.

### STEP 3: Attach Sides

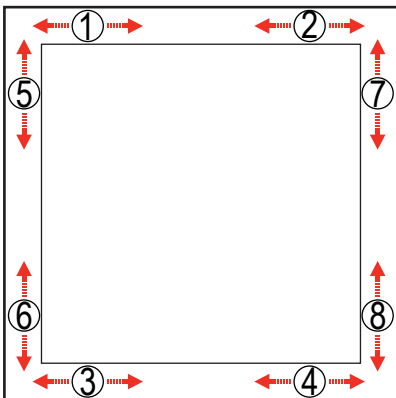

Once the middle of sides are attached, fully press the silicone welt into the channel, between center and corner at location 1. Repeat the process between center and corner at location 2.




To remove the graphic from the frame, locate the fabric **pull tab**. Gently pull on the tab to remove the graphic.


Do the same for welt on opposite side, at locations 3 & 4. Then repeat for locations 5 & 6 and 7 & 8.

Steps:

1) Apply SEG Graphics to front & back of assembled frame.

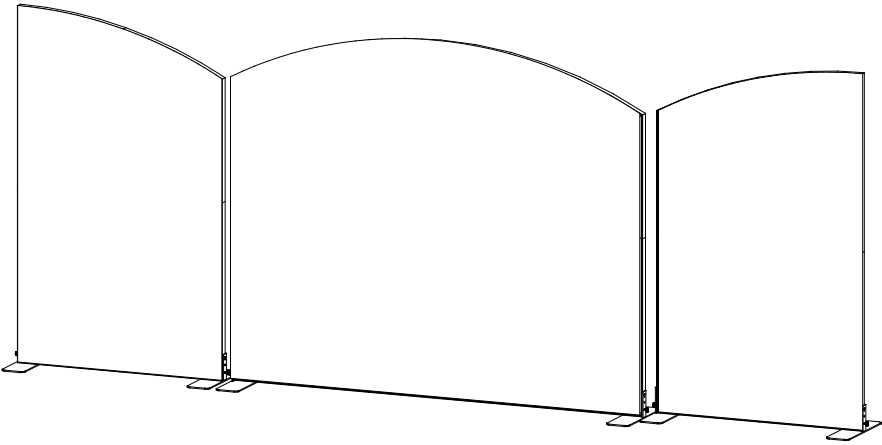

When assembled

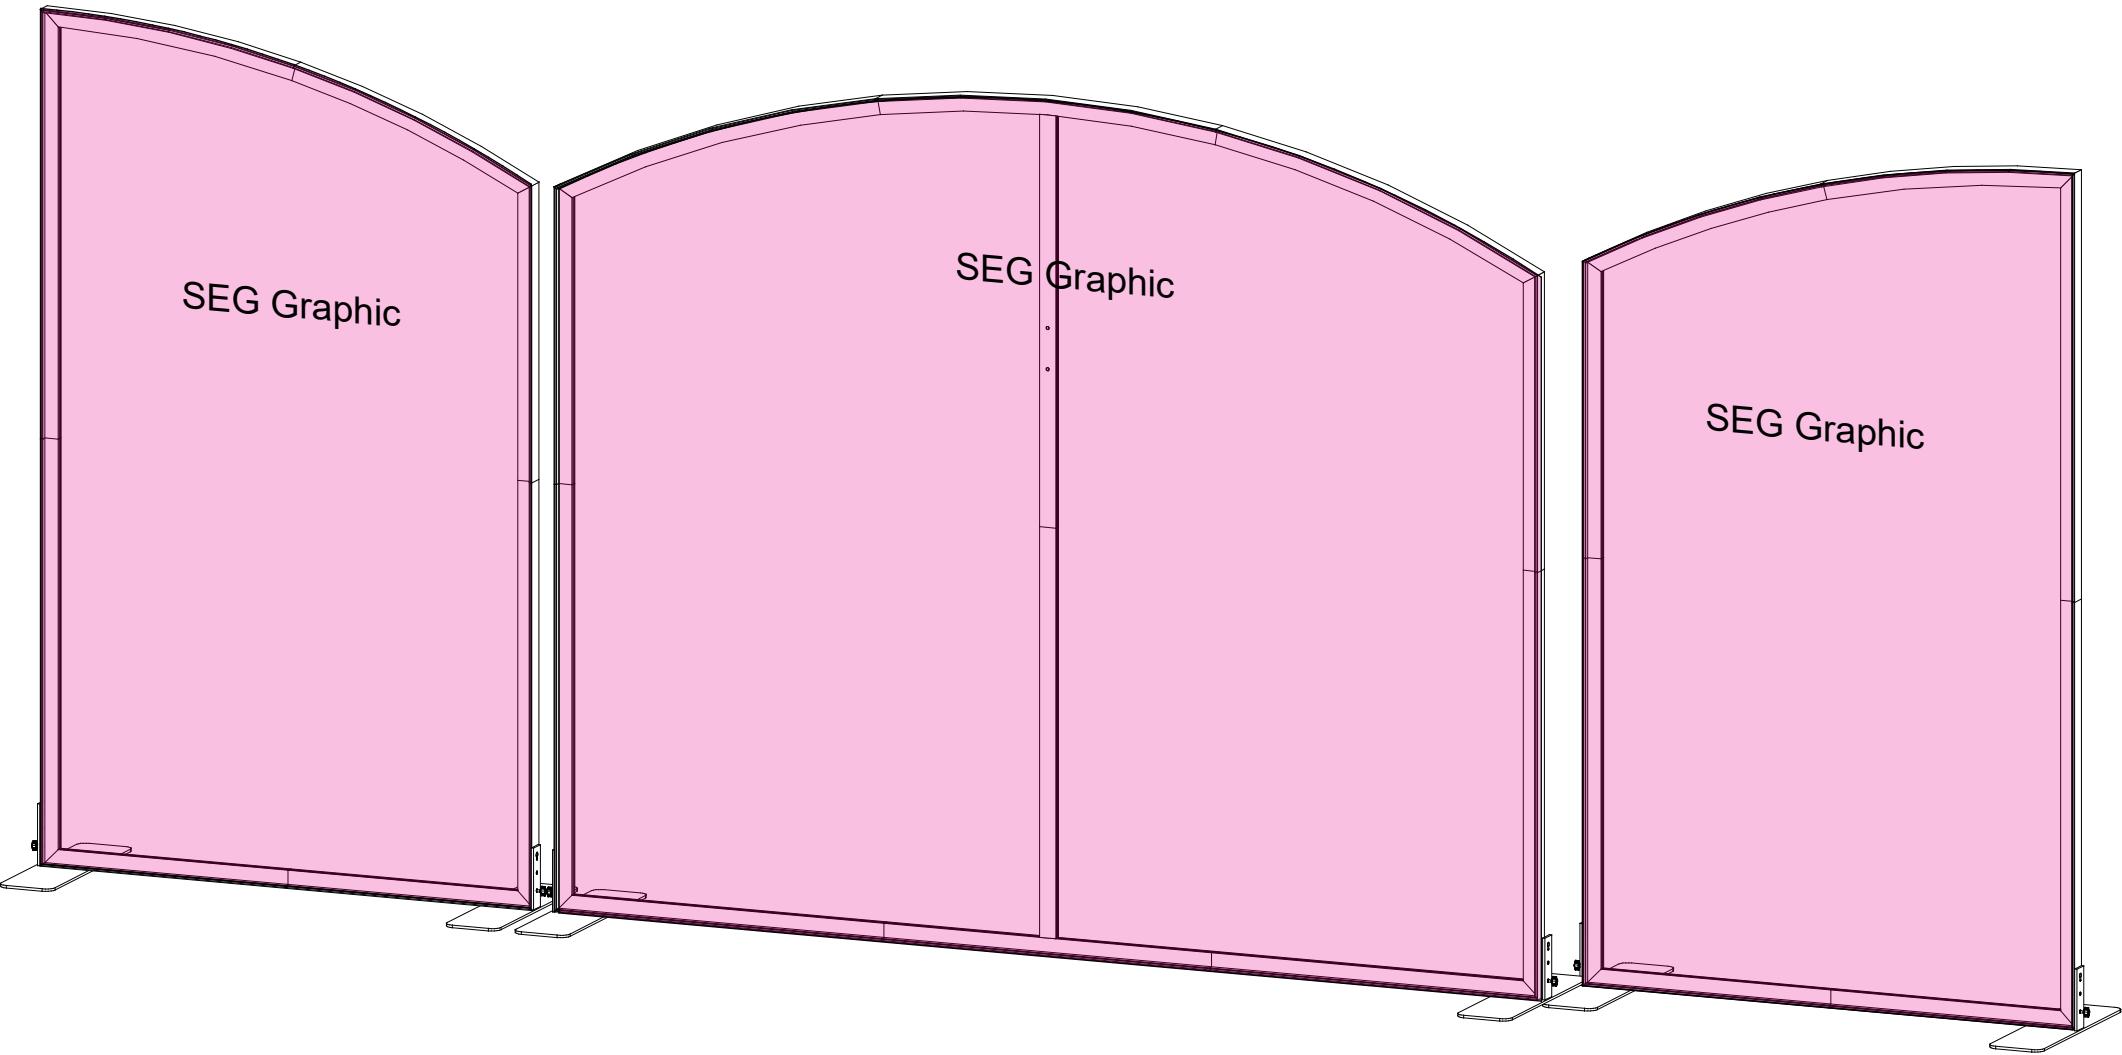

FRONT VIEW




| Item | Qty. | Description                        |
|------|------|------------------------------------|
| 14   | 1    | 47.5"h CEI152 Vertical Extrusion   |
| 15   | 1    | 47.5"h CEI152 Vertical Extrusion   |
| 16   | 1    | 47.5"h CEI152 Vertical Extrusion   |
| 17   | 1    | 47.5"h CEI152 Vertical Extrusion   |
| 18   | 1    | 42"w CEI152 Horizontal Extrusion   |
| 19   | 1    | 42"w CEI152 Horizontal Extrusion   |
| 20   | 1    | 38.353"w Z140 Horizontal Extrusion |
| 21   | 2    | Base Plate                         |

Steps:





Refer to the CEI152 Frame Assembly general information page.

- 1) Assemble verticals [14-15], [16-17] together using straight connectors.
- 2) Connect vertical assemblies [14/15], [16/17] between horizontals [18,19] using corner connectors.
- 3) Attach horizontal [20] between vertical assemblies.
- 4) Connect Base Plates [21] to frame assembly.  
See [Base Plate Attachment](#) detail.
- 5) Connect power cords to Supernova lights as shown.

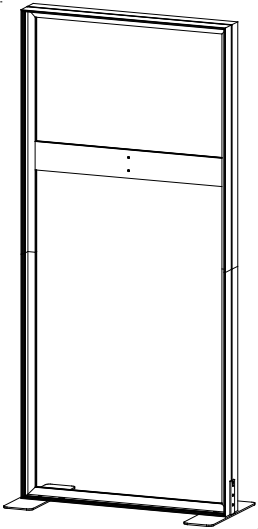

When assembled


Assemble frame flat on ground.

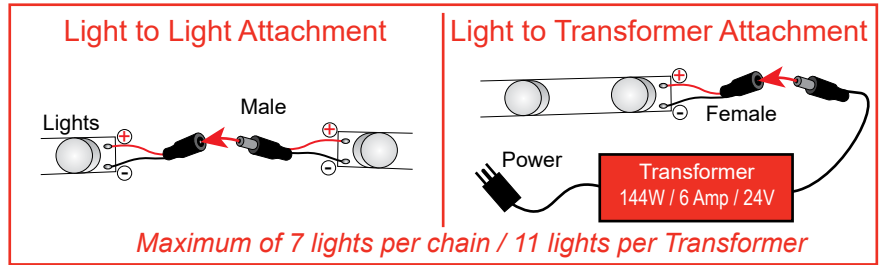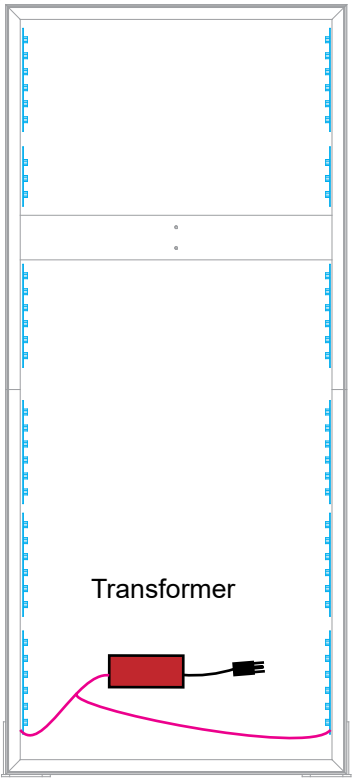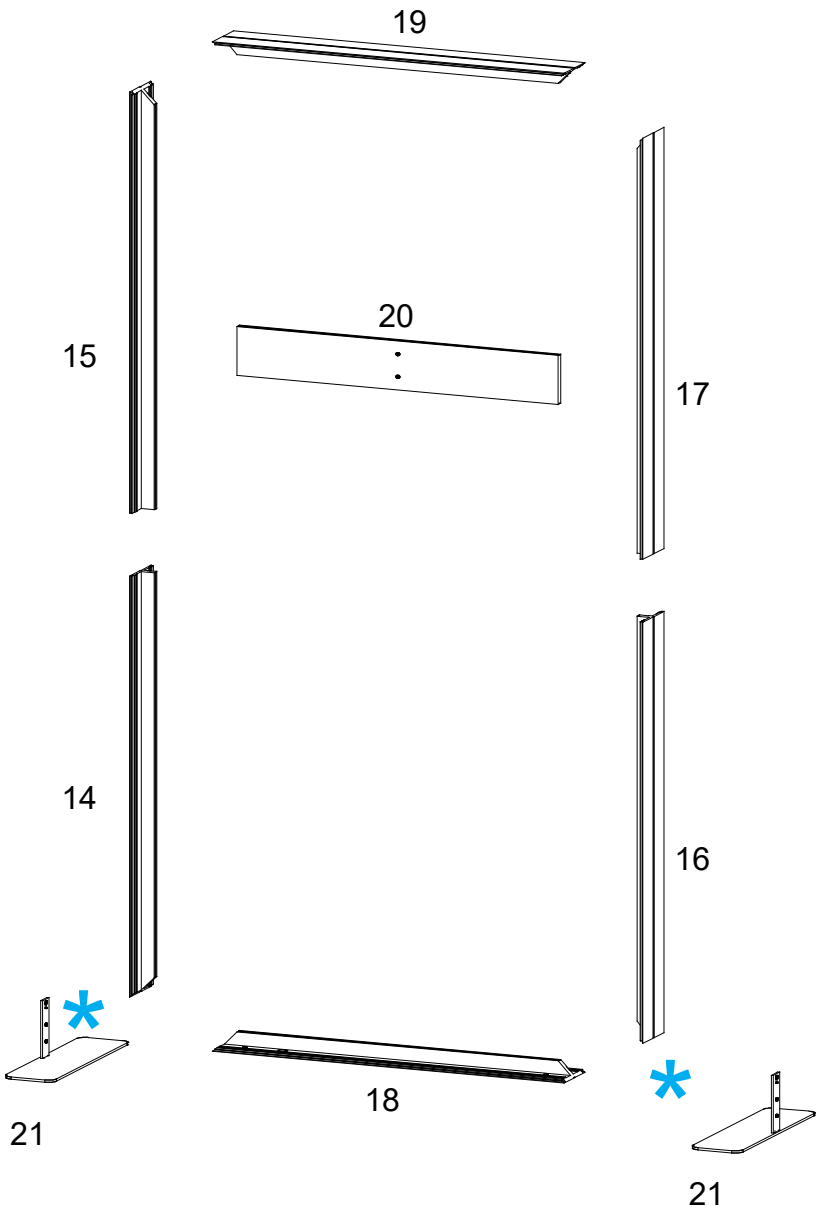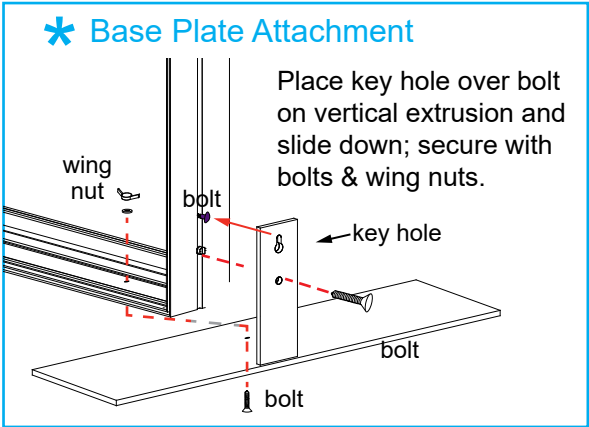

- Steps:
- 1) Apply SEG graphic to *front* of frame assembly. *Refer to the SEG Installation general information page.*
  - 2) Connect front Monitor Mount to horizontal [20].  
See **Monitor Mount Attachment** detail.
  - 3) Apply SEG blocker to *back* of frame assembly.

**\* Monitor Mount Attachment**

Attach Monitor Mount to horizontal extrusion using standoff barrels, bolts & wing nuts.

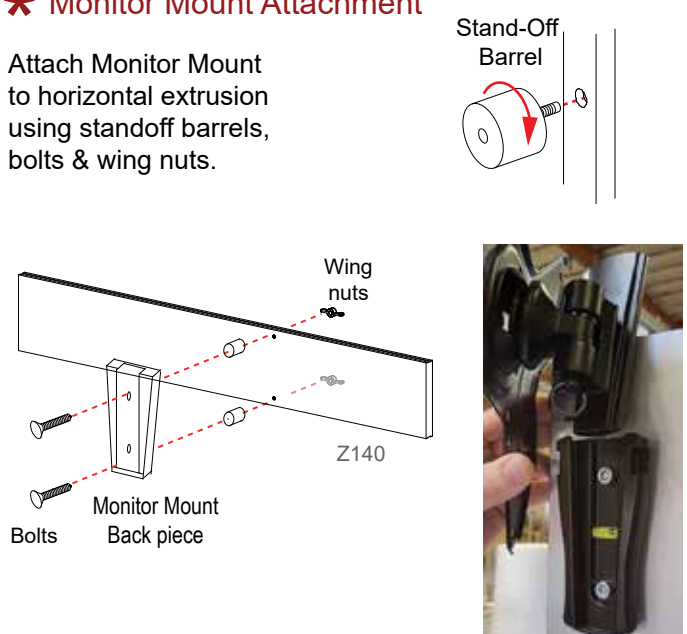

Stand-Off Barrel



Wing nuts

Z140

Bolts


Monitor Mount Back piece

Slide monitor mount into back piece.



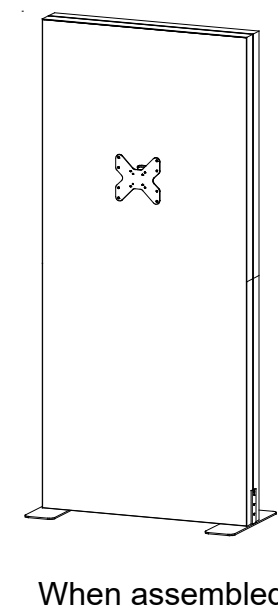
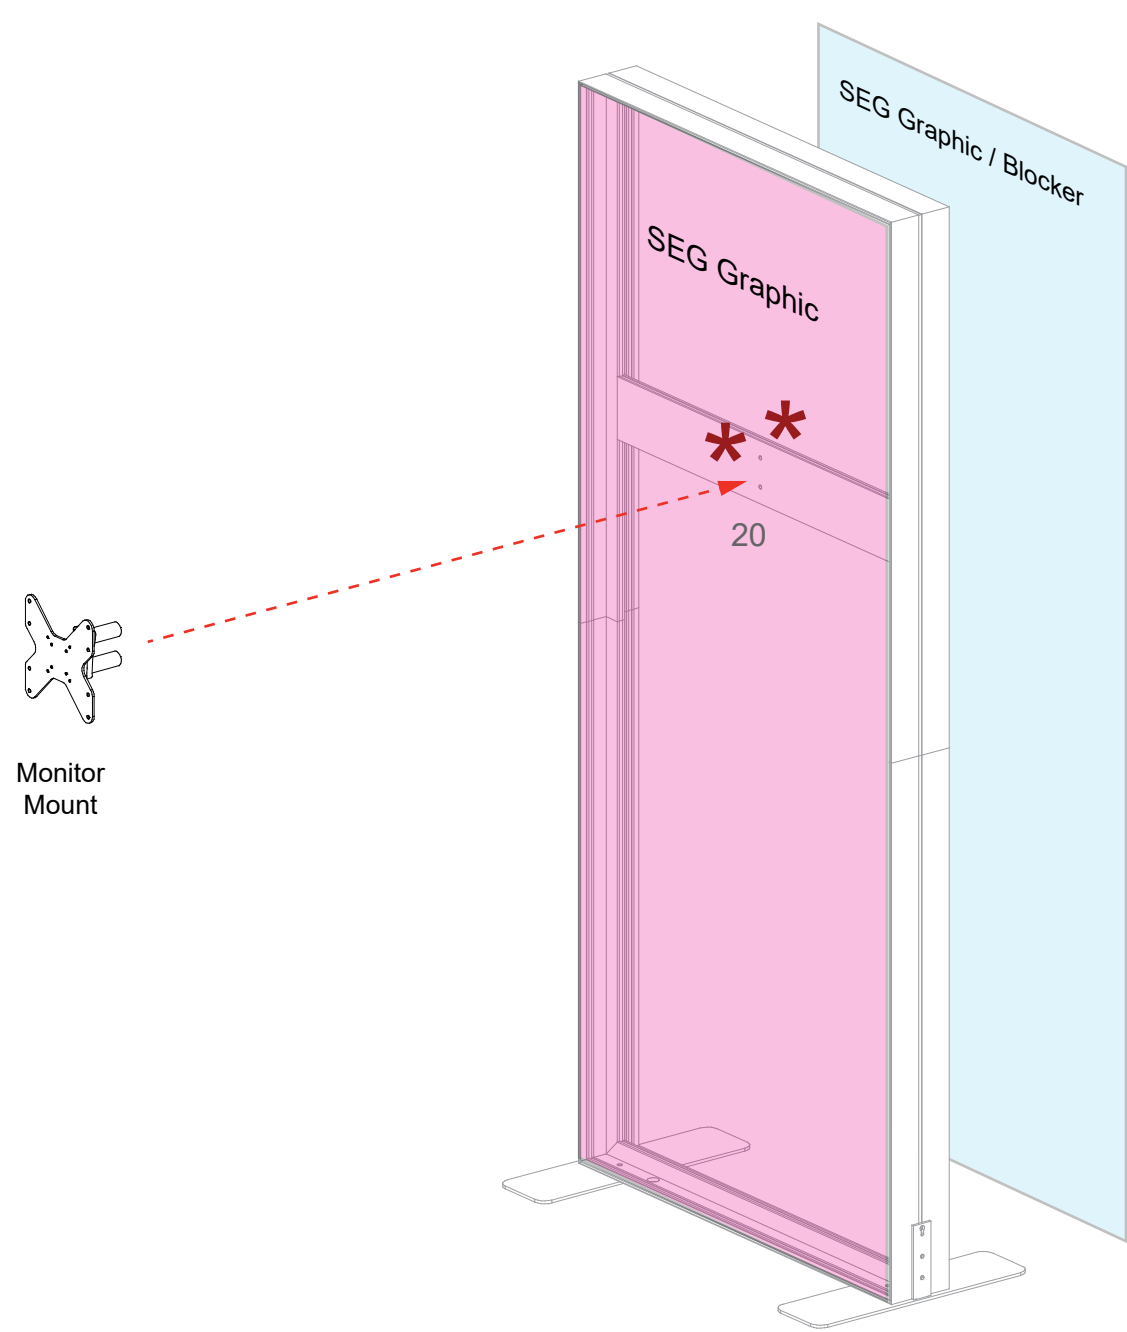


| Item | Qty. | Description                        |
|------|------|------------------------------------|
| 22   | 1    | 41.040”h CEI152 Vertical Extrusion |
| 23   | 1    | 41.040”h CEI152 Vertical Extrusion |
| 24   | 1    | 42”w CEI152 Horizontal Extrusion   |
| 25   | 1    | 42”w CEI152 Horizontal Extrusion   |



- Steps:
- 1) Attach U-Channel to lower horizontal [24]. See [U-Channel Attachment](#) detail.
  - 2) Assemble verticals [22,23] between horizontals [24,25] using corner connectors.  
*Refer to the CEI152 Frame Assembly general information page.*
  - 3) Attach lower horizontal [24] to Base using threaded pins & wing nuts.  
See [Pin & Wing Nut Connection](#) detail.
  - 4) Attach upper horizontal [25] to Counter Top using threaded pins & wing nuts.  
See [Pin & Wing Nut Connection](#) detail.
  - 5) Connect power cords to Supernova lights as shown.
  - 6) Apply SEG graphics to front & back of lightbox. *Refer to the SEG Installation general information page.*

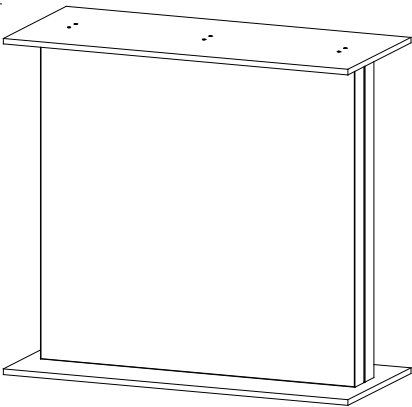

When assembled

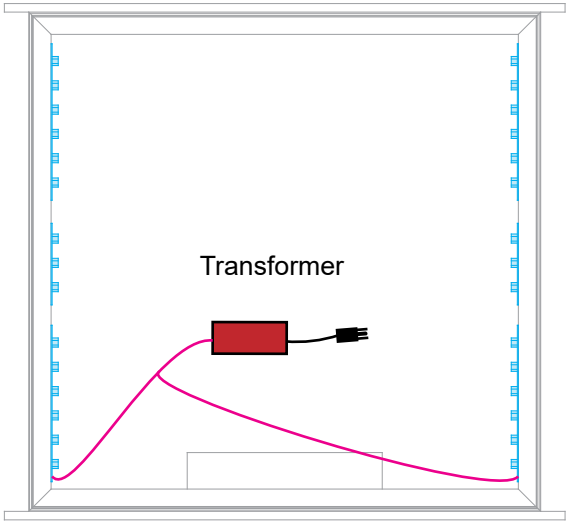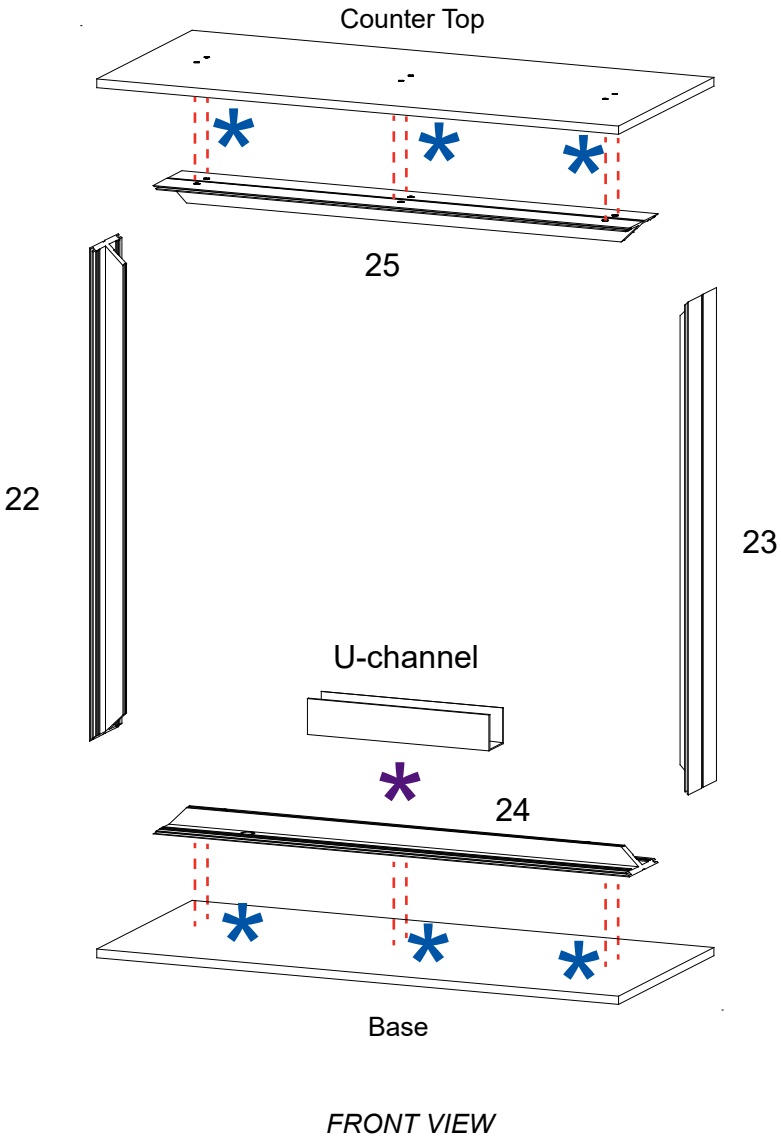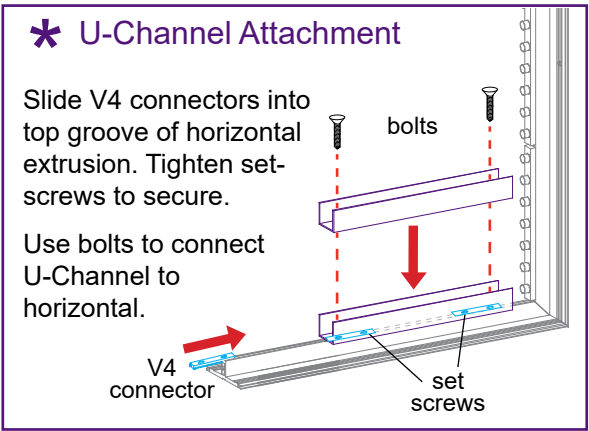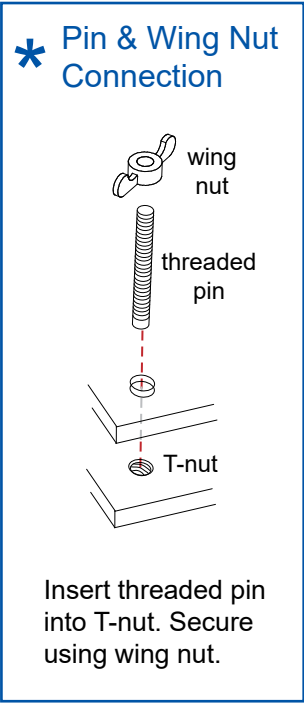


FRONT ELEVATION VIEW

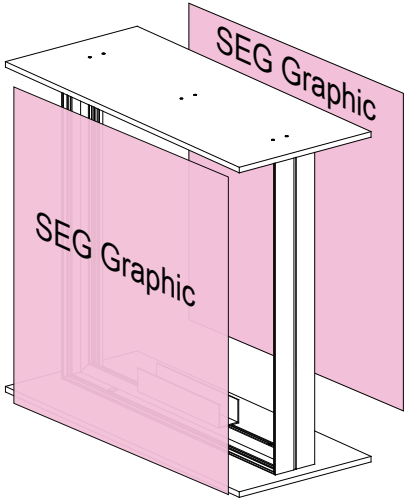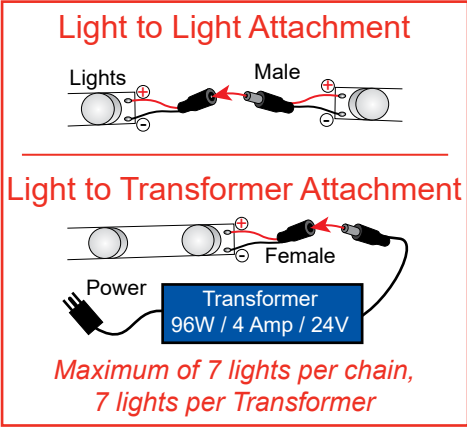


Steps:

- 1) Attach pins at bottom interior of side panels. *Note: Pins are designed to be slightly angled.*
- 2) Use screw caps to secure side panels to front & back panels.
- 3) Slide floor into the bottom of assembled pedestal base. The floor will sit on pins of the side panels.
- 4) Connect shelf supports with Velcro inside of panels, then place shelf on top of supports.
- 5) Attach Counter Top to assembled pedestal base. See Counter Top Attachment detail.

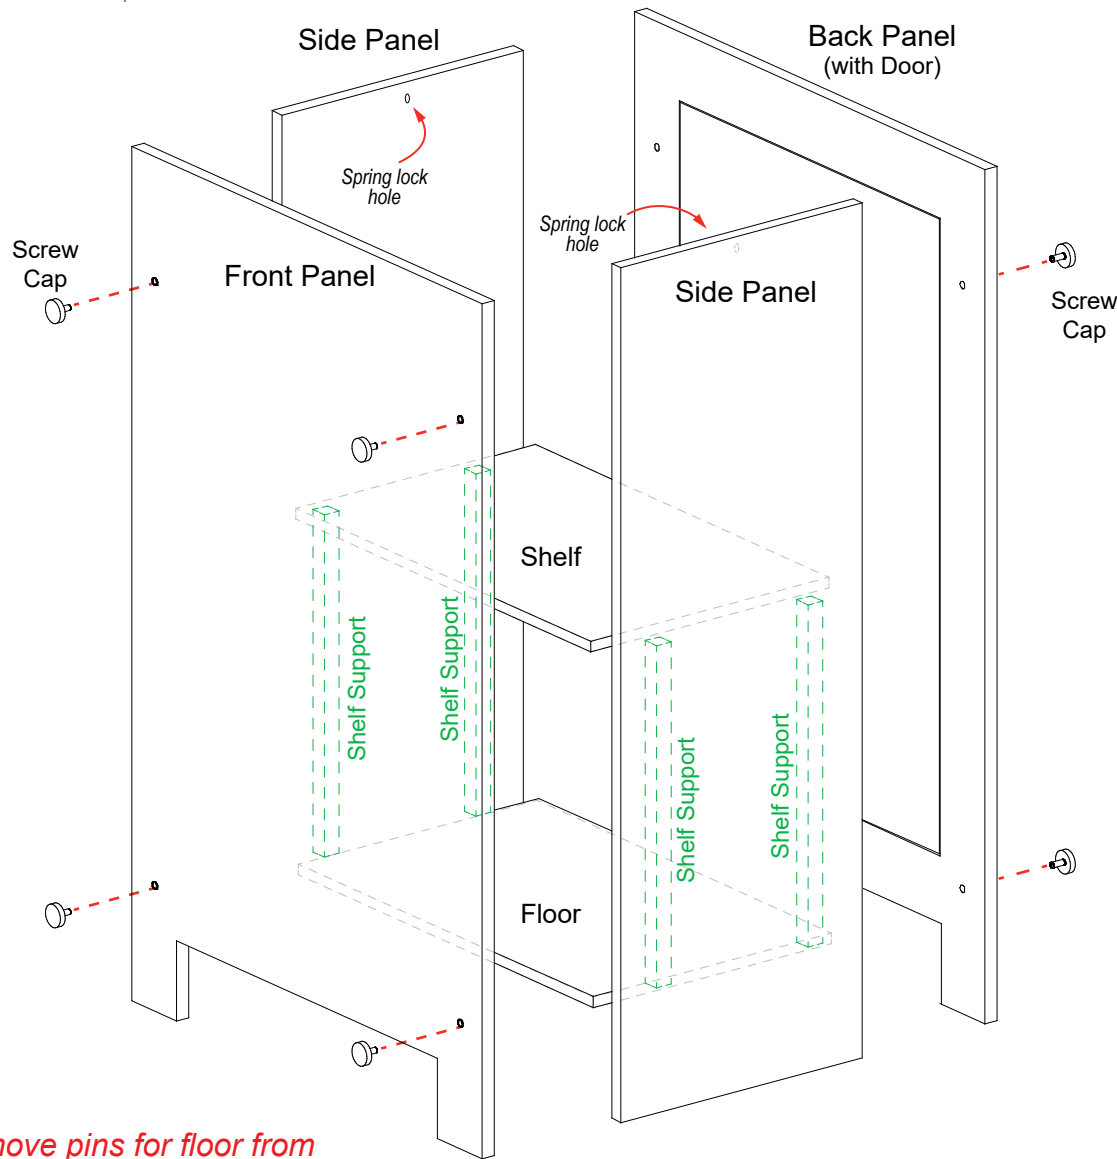


*NOTE: Remove pins for floor from side panels when packing.*

Pedestal Base Assembly

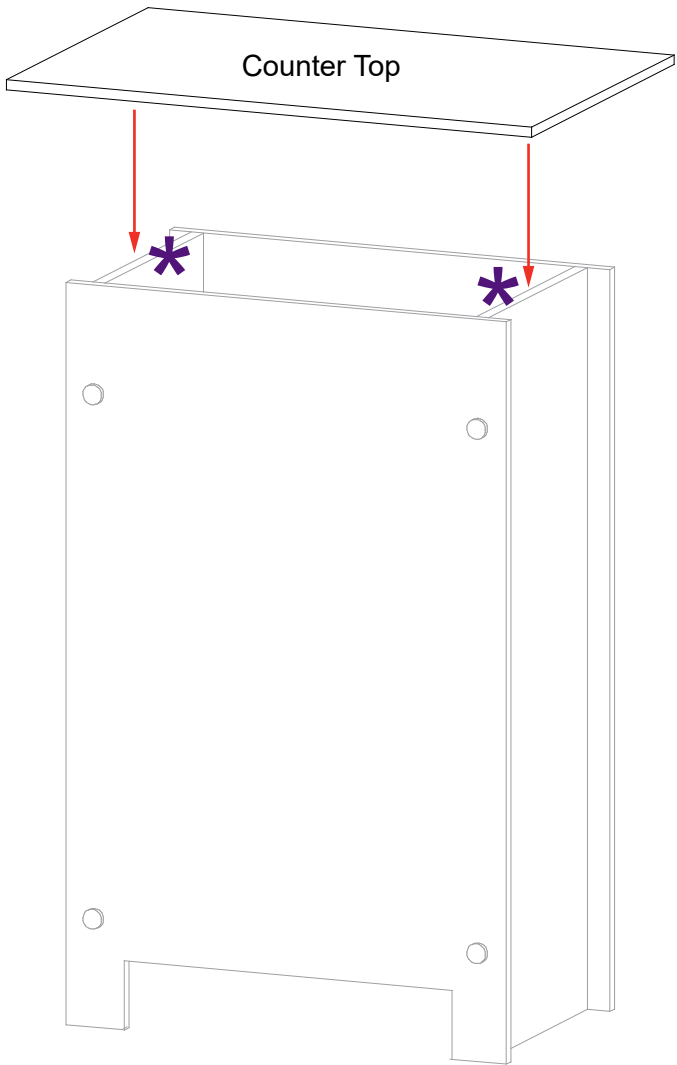


Pedestal Top Attachment

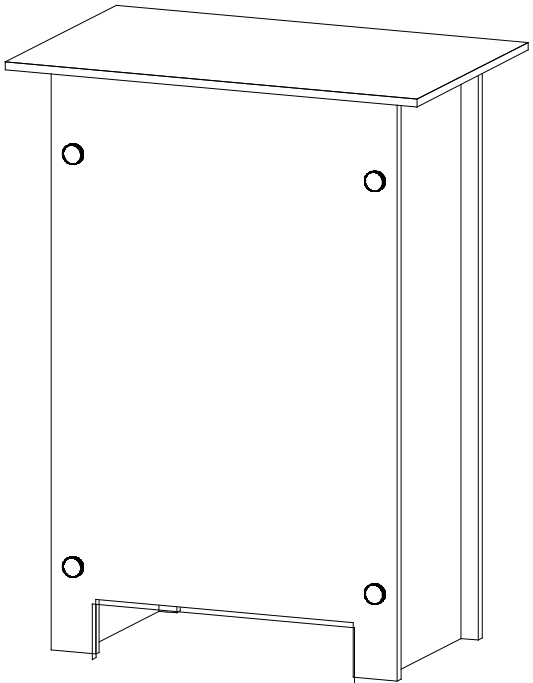


When assembled

\* Counter Top Attachment



Align hole with pin.



Rotate pin. Spring will push pin into hole.